

SP⁺ / SP⁺ HIGH SPEED – The classic all-rounder



SP⁺

The standard version of these low-backlash planetary gearboxes with output shaft is ideally suited for high positioning accuracy and highly dynamic cyclic operation. The SP⁺ HIGH SPEED is particularly appropriate for applications with maximum speeds during continuous operation.

Product highlights

Max. torsional backlash [arcmin] $\leq 1 - 4$

Various output configurations

Smooth shaft, shaft with key, splined shaft (DIN 5480), blind hollow shaft

High nominal speeds

SP⁺ HIGH SPEED version for applications in continuous operation


Flexible drive options

Clamping hub socket, coupling, optimized mass inertia, keyed clamping hub socket


Other gearbox models

Corrosion resistant design, ATEX, food-grade lubrication, low friction version

The SP⁺ compared to the industry standard

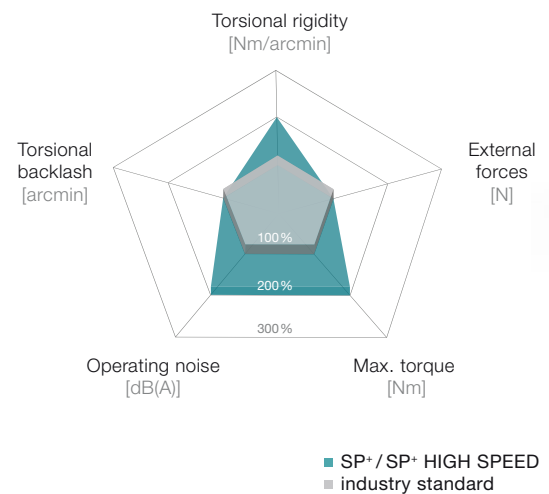

SP⁺ planetary gearbox in corrosion resistant design

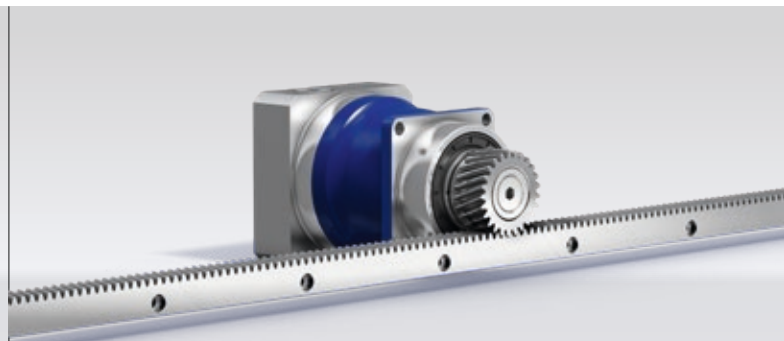


SP⁺ with rack and pinion

Connectivity of the motor shafts due to the large number of clamping hub diameters

Various output configurations


Tapered roller bearing for absorbing axial and radial forces

Extremely smooth running due to helical toothing

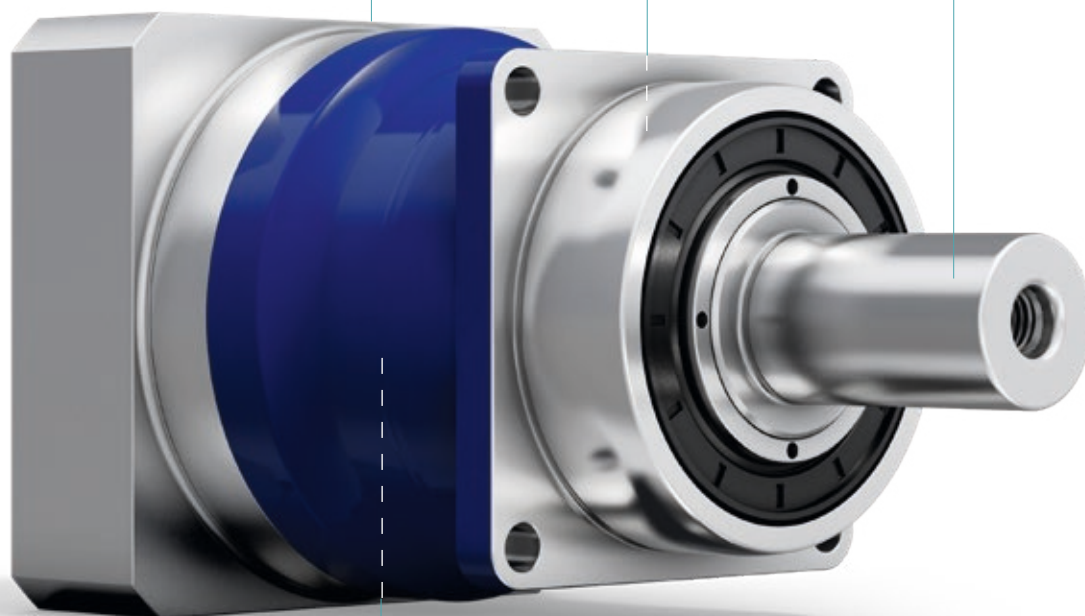

Heat build-up approx. 40°C

Heat build-up approx. 80°C

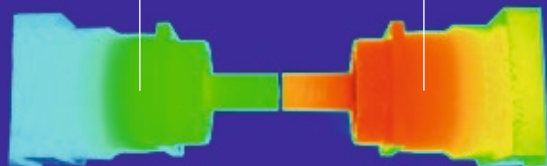

SP* HIGH SPEED
MC version

Industry standard



SP* with metal bellows coupling

SP+ 060 MF 1-stage

				1-stage						
Ratio			<i>i</i>		3	4	5	7	8	10
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	Nm	48	67	67	67	51	51
				in.lb	425	595	595	595	453	453
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	Nm	36	50	50	50	38	38
				in.lb	319	443	443	443	336	336
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	Nm	21	27	27	26	26	27
				in.lb	190	239	236	226	230	237
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	Nm	96	109	109	109	100	100
				in.lb	850	965	965	965	885	885
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{e)}			<i>n</i> _{1N}	rpm	3300	3300	3300	4000	4000	4000
Max. input speed			<i>n</i> _{1Max}	rpm	7500	7500	7500	7500	7500	7500
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	Nm	0.68	0.52	0.48	0.34	0.32	0.32
				in.lb	6.0	4.6	4.2	3.0	2.8	2.8
Max. backlash			<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2					
Torsional rigidity ^{b)}			<i>C</i> _{i21}	Nm/arcmin	3.5					
				in.lb/arcmin	31					
Max. axial force ^{c)}			<i>F</i> _{2AMax}	N	2400					
				lb _f	540					
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	N	2800					
				lb _f	630					
Max. tilting moment			<i>M</i> _{2KMax}	Nm	152					
				in.lb	1345					
Efficiency at full load			<i>η</i>	%	97					
Service life			<i>L</i> _h	h	> 20000					
Weight (incl. standard adapter plate)			<i>m</i>	kg	1.9					
				lb _m	4.2					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	dB(A)	≤ 58					
Max. permitted housing temperature				°C	+90					
				F	194					
Ambient temperature				°C	–15 to +40					
				F	5 to 104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00060AA016.000-X					
				mm	X = 012.000 - 035.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	B	11	<i>J</i> _i	kgcm ²	0.21	0.15	0.12	0.10	0.10	0.09
				10 ⁻³ in.lb.s ²	0.19	0.13	0.11	0.09	0.09	0.08
	C	14	<i>J</i> _i	kgcm ²	0.28	0.22	0.20	0.18	0.16	0.16
				10 ⁻³ in.lb.s ²	0.25	0.19	0.18	0.16	0.14	0.14
	E	19	<i>J</i> _i	kgcm ²	0.61	0.55	0.52	0.50	0.49	0.49
				10 ⁻³ in.lb.s ²	0.54	0.49	0.46	0.44	0.43	0.43

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

1-stage





up to 11⁴⁾ (B)
clamping hub
diameter

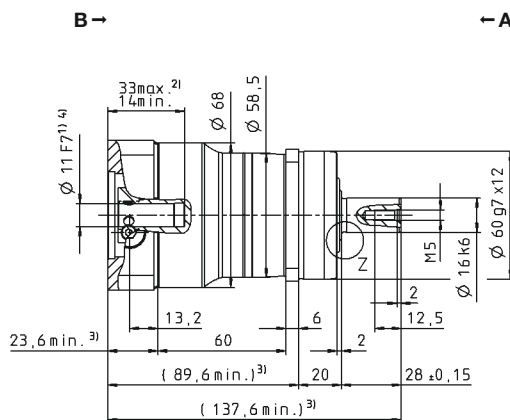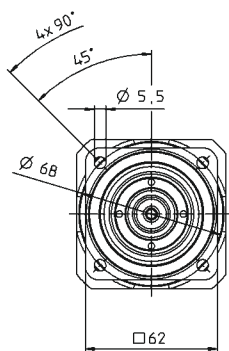

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

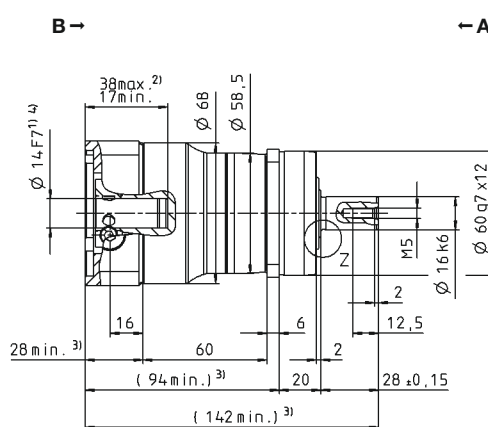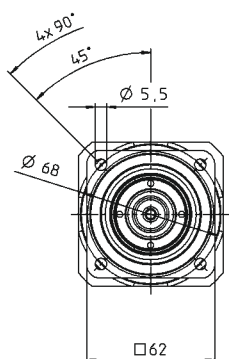


up to 19⁴⁾ (E)
clamping hub
diameter

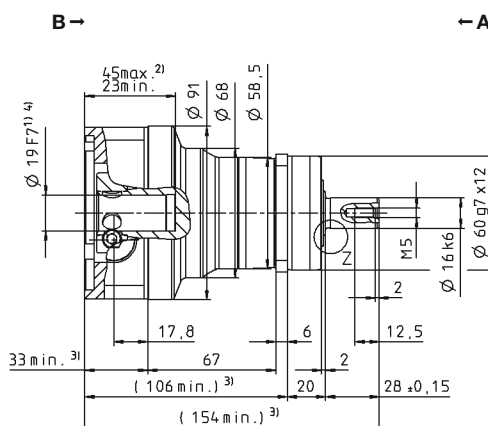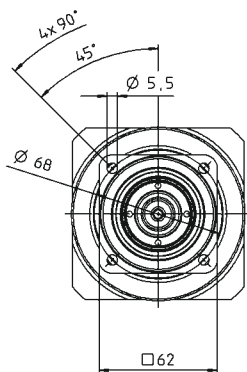


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 060 MF 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	57	57	67	57	57	67	57	67	48	56	48
				<i>in.lb</i>	507	507	595	507	507	595	507	595	423	499	423
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	50	50	50	50	50	50	50	50	38	50	38
				<i>in.lb</i>	443	443	443	443	443	443	443	443	336	443	336
Nominal torque (at <i>n</i> _N)			<i>T</i> _{2N}	<i>Nm</i>	38	40	40	40	38	40	40	40	31	40	31
				<i>in.lb</i>	332	354	351	357	333	357	357	357	270	357	272
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	109	109	109	109	109	109	109	109	109	109	100
				<i>in.lb</i>	965	965	965	965	965	965	965	965	965	965	885
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	4400	4400	4400	4400	4400	4400	4400	4800	4800	5500	5500
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	0.28	0.25	0.23	0.22	0.24	0.20	0.20	0.19	0.19	0.17	0.18
				<i>in.lb</i>	2.5	2.2	2.0	1.9	2.1	1.8	1.8	1.7	1.7	1.5	1.6
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 6 / Reduced ≤ 4										
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	3.5										
				<i>in.lb/arcmin</i>	31										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	2400										
				<i>lb_f</i>	540										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	2800										
				<i>lb_f</i>	630										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	152										
				<i>in.lb</i>	1345										
Efficiency at full load			<i>η</i>	%	94										
Service life			<i>L</i> _h	<i>h</i>	> 20000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	2.0										
				<i>lb_m</i>	4.4										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 57										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	–15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00060AA016.000-X										
				<i>mm</i>	X = 012.000 - 035.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	B	11	<i>J</i> _i	<i>kgcm²</i>	0.077	0.069	0.068	0.061	0.061	0.061	0.057	0.057	0.056	0.056	0.056
				<i>10⁻³ in.lb.s²</i>	0.068	0.061	0.060	0.054	0.054	0.054	0.050	0.050	0.050	0.050	0.050
	C	14	<i>J</i> _i	<i>kgcm²</i>	0.17	0.16	0.16	0.16	0.16	0.16	0.15	0.15	0.15	0.15	0.15
				<i>10⁻³ in.lb.s²</i>	0.15	0.14	0.14	0.14	0.14	0.14	0.13	0.13	0.13	0.13	0.13

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange







^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft

up to 11 ⁴⁾ (B) ⁵⁾
clamping hub
diameter

Motor shaft diameter [mm]


up to 14 ⁴⁾ (C)
clamping hub
diameter

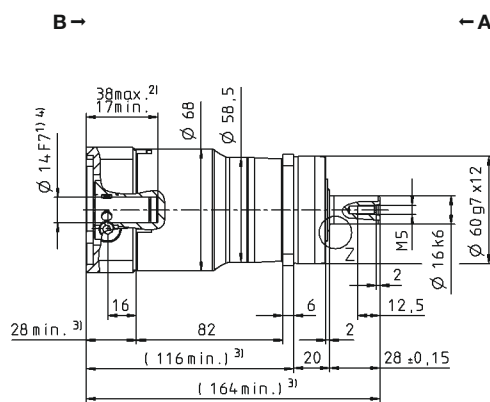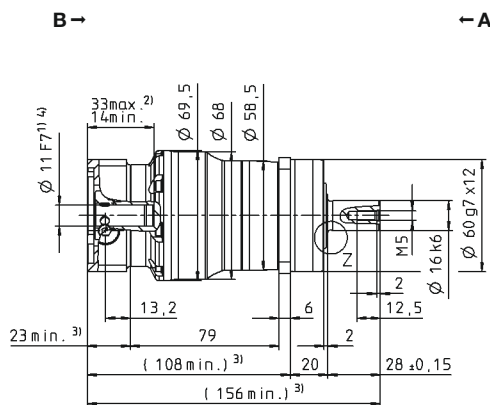 $\frac{d}{ds}$


MF

Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions


- 1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

- 5) Standard clamping hub diameter



SP⁺ 075 MF 1-stage

				1-stage						
Ratio			<i>i</i>		3	4	5	7	8	10
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	Nm	136	176	176	176	152	152
				in.lb	1204	1558	1558	1558	1345	1345
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	Nm	102	132	132	132	114	114
				in.lb	903	1168	1168	1168	1009	1009
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	Nm	63	81	81	81	80	81
				in.lb	558	719	716	719	712	720
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	Nm	139	185	250	250	250	250
				in.lb	1230	1640	2213	2213	2213	2213
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{e)}			<i>n</i> _{1N}	rpm	2900	2900	2900	3100	3100	3100
Max. input speed			<i>n</i> _{1Max}	rpm	7500	7500	7500	7500	7500	7500
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	Nm	1.5	1.4	0.96	0.72	0.55	0.52
				in.lb	14	12	8.5	6.4	4.9	4.6
Max. backlash			<i>j</i> _t	arcmin	Standard ≤ 4 / Reduced ≤ 2					
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	Nm/arcmin	10					
				in.lb/arcmin	89					
Max. axial force ^{c)}			<i>F</i> _{2AMax}	N	3350					
				lb _f	754					
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	N	4200					
				lb _f	945					
Max. tilting moment			<i>M</i> _{2KMax}	Nm	236					
				in.lb	2089					
Efficiency at full load			<i>η</i>	%	97					
Service life			<i>L</i> _h	h	> 20000					
Weight (incl. standard adapter plate)			<i>m</i>	kg	3.9					
				lb _m	8.6					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	dB(A)	≤ 59					
Max. permitted housing temperature				°C	+90					
				F	194					
Ambient temperature				°C	–15 to +40					
				F	5 to 104					
Lubrication					Lubricated for life					
Direction of rotation					In- and output same direction					
Protection class					IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00150AA022.000-X					
				mm	X = 019.000 - 042.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	C	14	<i>J</i> _i	kgcm ²	0.86	0.61	0.51	0.42	0.38	0.38
				10 ⁻³ in.lb.s ²	0.76	0.54	0.45	0.37	0.34	0.34
	E	19	<i>J</i> _i	kgcm ²	1.03	0.78	0.68	0.59	0.54	0.54
				10 ⁻³ in.lb.s ²	0.91	0.69	0.60	0.52	0.48	0.48
	G	24	<i>J</i> _i	kgcm ²	2.40	2.15	2.05	1.96	1.91	1.91
				10 ⁻³ in.lb.s ²	2.12	1.90	1.81	1.73	1.69	1.69

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

1-stage





up to 14⁴⁾ (C)
clamping hub
diameter

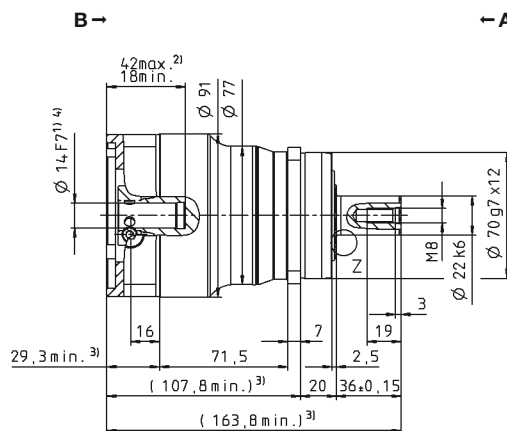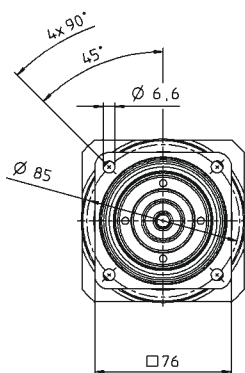

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

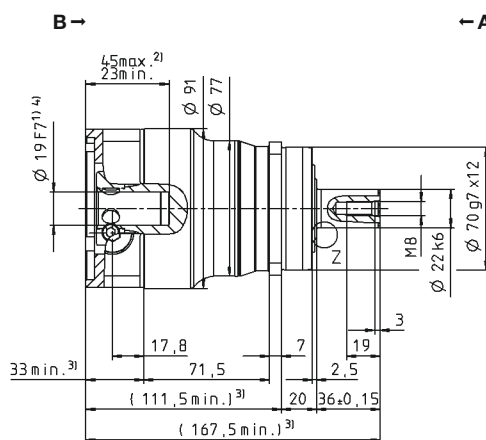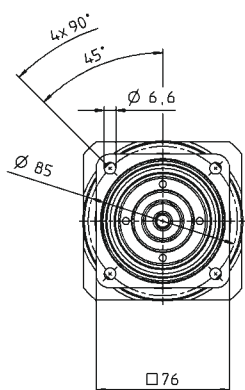


up to 24⁴⁾ (G)
clamping hub
diameter

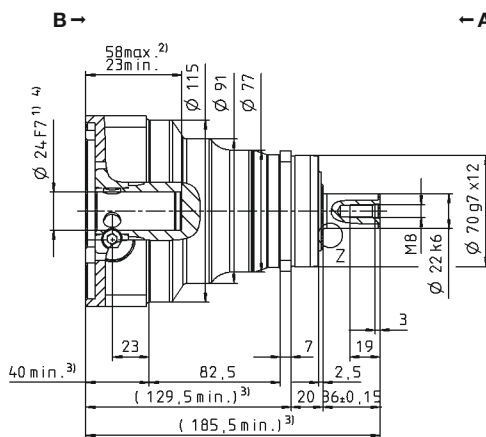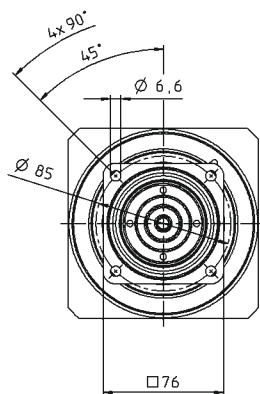


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 075 MF 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	126	126	158	126	126	158	126	158	105	113	105
				<i>in.lb</i>	1118	1118	1398	1118	1118	1398	1118	1398	932	998	932
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	126	126	132	126	126	132	126	132	105	113	105
				<i>in.lb</i>	1118	1118	1168	1118	1118	1168	1118	1168	932	998	932
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	101	101	106	101	101	106	101	106	84	90	84
				<i>in.lb</i>	895	895	935	895	895	935	895	935	746	799	746
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	250	250	250	250	250	250	250	250	250	250	250
				<i>in.lb</i>	2213	2213	2213	2213	2213	2213	2213	2213	2213	2213	2213
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	3500	3500	3500	3500	3500	3500	3500	3800	3800	4500	4500
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500	8500
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	0.50	0.41	0.35	0.32	0.44	0.28	0.26	0.23	0.23	0.21	0.23
				<i>in.lb</i>	4.4	3.6	3.1	2.8	3.9	2.5	2.3	2.0	2.0	1.9	2.0
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 6 / Reduced ≤ 4										
Torsional rigidity ^{b)}			<i>C</i> _{i21}	<i>Nm/arcmin</i>	10										
				<i>in.lb/arcmin</i>	89										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	3350										
				<i>lb_f</i>	754										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	4200										
				<i>lb_f</i>	945										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	236										
				<i>in.lb</i>	2089										
Efficiency at full load			<i>η</i>	%	94										
Service life			<i>L</i> _h	<i>h</i>	> 20000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	3.6										
				<i>lb_m</i>	8.0										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 55										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	–15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00150AA022.000-X										
				<i>mm</i>	X = 019.000 - 042.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	B	11	<i>J</i> _i	<i>kgcm²</i>	0.16	0.13	0.13	0.10	0.10	0.10	0.09	0.09	0.09	0.09	0.09
				<i>10⁻³ in.lb.s²</i>	0.14	0.12	0.12	0.09	0.09	0.09	0.08	0.08	0.08	0.08	0.08
	C	14	<i>J</i> _i	<i>kgcm²</i>	0.23	0.20	0.20	0.18	0.18	0.18	0.16	0.16	0.16	0.16	0.16
				<i>10⁻³ in.lb.s²</i>	0.20	0.18	0.18	0.16	0.16	0.16	0.14	0.14	0.14	0.14	0.14
	E	19	<i>J</i> _i	<i>kgcm²</i>	0.55	0.53	0.52	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49
				<i>10⁻³ in.lb.s²</i>	0.49	0.47	0.46	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

2-stage





up to 11⁴⁾ (B)
clamping hub
diameter

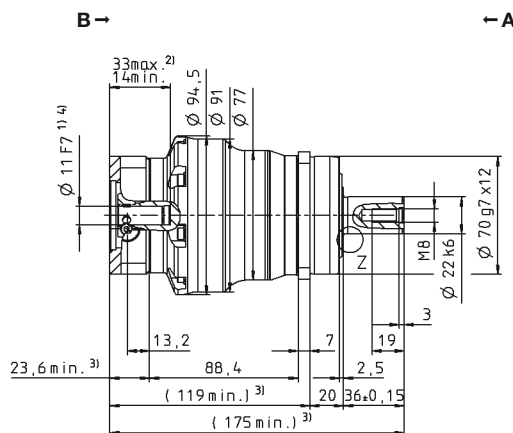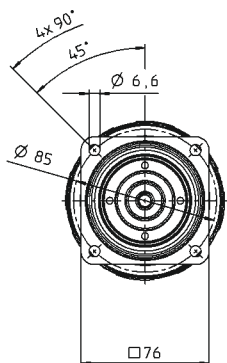

up to 14⁴⁾ (C)⁵⁾
clamping hub
diameter

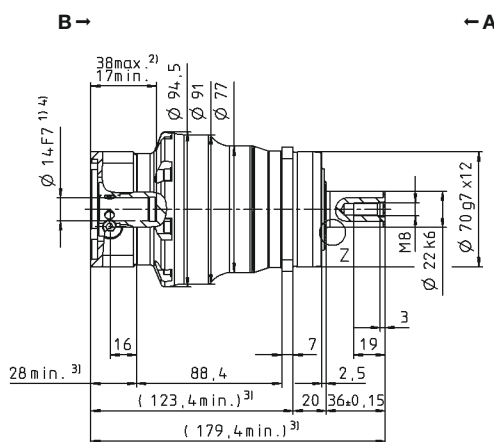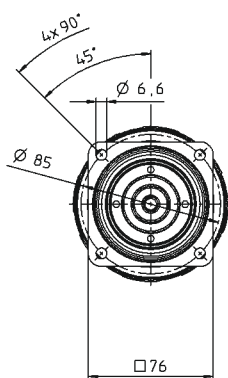


up to 19⁴⁾ (E)
clamping hub
diameter

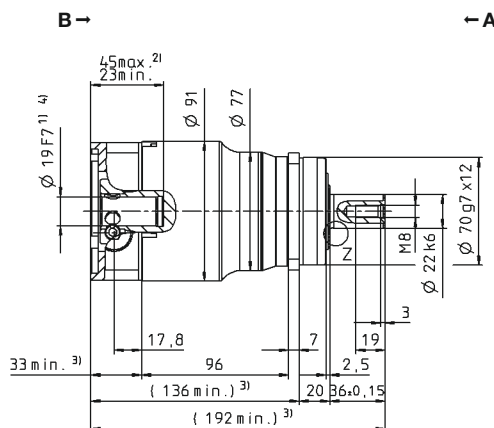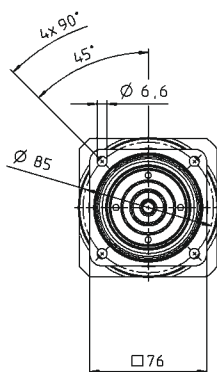


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 100 MF 1-stage

				1-stage							
Ratio				i		3	4	5	7	8	10
Max. torque ^{a) b) e)}				T _{2a}	Nm	376	495	495	428	376	376
					in.lb	3328	4381	4381	3784	3328	3328
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				T _{2B}	Nm	282	378	378	378	282	282
					in.lb	2496	3346	3346	3346	2496	2496
Nominal torque (at n _{IN})				T _{2N}	Nm	131	171	169	166	166	174
					in.lb	1157	1510	1498	1473	1470	1538
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				T _{2Not}	Nm	500	625	625	625	625	625
					in.lb	4425	5532	5532	5532	5532	5532
Permitted average input speed (at T _{2N} and 20 °C ambient temperature) ^{d)}				n _{1N}	rpm	2500	2500	2500	2800	2800	2800
Max. input speed				n _{1Max}	rpm	5500	5500	5500	5500	5500	5500
Mean no load running torque ^{b)} (at n _i = 3000 rpm and 20 °C gearbox temperature)				T ₀₁₂	Nm	3.1	2.4	2.1	1.3	1.0	1.0
					in.lb	28	21	18	12	9.2	9.2
Max. backlash				j _t	arcmin	Standard ≤ 3 / Reduced ≤ 1					
Torsional rigidity ^{b)}				C _{t21}	Nm/arcmin	31					
					in.lb/arcmin	274					
Max. axial force ^{c)}				F _{2AMax}	N	5650					
					lb _f	1271					
Max. lateral force ^{c)}				F _{2QMax}	N	6600					
					lb _f	1485					
Max. tilting moment				M _{2KMax}	Nm	487					
					in.lb	4310					
Efficiency at full load				η	%	97					
Service life				L _h	h	> 20000					
Weight (incl. standard adapter plate)				m	kg	7.7					
					lb _m	17					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				L _{PA}	dB(A)	≤ 58					
Max. permitted housing temperature					°C	+90					
					F	194					
Ambient temperature					°C	-15 to +40					
					F	5 to 104					
Lubrication						Lubricated for life					
Direction of rotation						In- and output same direction					
Protection class						IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex®)						BC2-00300AA032.000-X					
					mm	X = 024.000 - 060.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	E	19	J _i	kgcm ²	3.29	2.35	1.92	1.60	1.38	1.38	
				10 ⁻³ in.lb.s ²	2.91	2.08	1.70	1.42	1.22	1.22	
	G	24	J _i	kgcm ²	3.99	3.04	2.61	2.29	2.07	2.07	
				10 ⁻³ in.lb.s ²	3.53	2.69	2.31	2.03	1.83	1.83	
	H	28	J _i	kgcm ²	3.59	2.65	2.22	1.90	1.68	1.68	
				10 ⁻³ in.lb.s ²	3.18	2.35	1.96	1.68	1.49	1.49	
	K	38	J _i	kgcm ²	11.1	10.1	9.68	9.36	9.14	9.14	
				10 ⁻³ in.lb.s ²	9.82	8.94	8.57	8.28	8.09	8.09	

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

1-stage





up to 19⁴⁾ (E)
clamping hub diameter

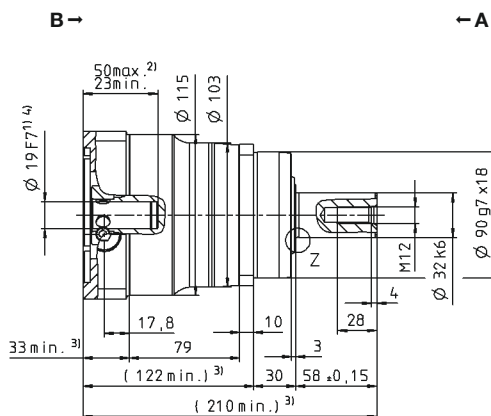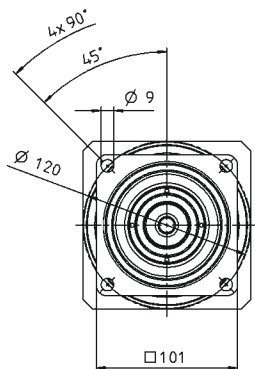

up to 24/28⁴⁾
(G⁵⁾/H) clamping
hub diameter

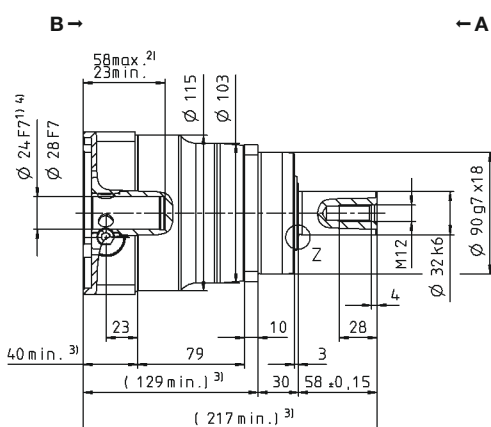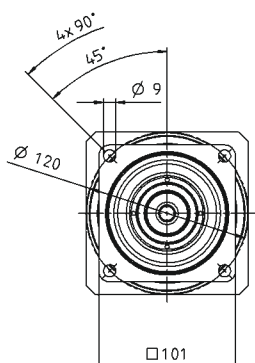


up to 38⁴⁾ (K)
clamping hub diameter

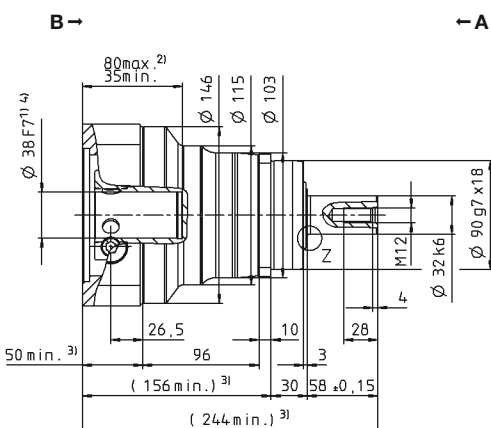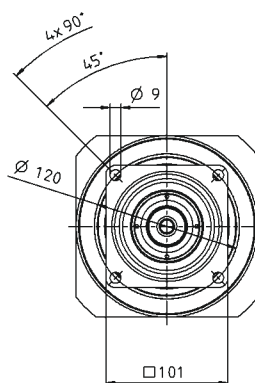


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 100 MF 2-stage

				2-stage															
Ratio				i		16	20	25	28	32	35	40	50	64	70	100			
Max. torque ^{a) b) e)}				T _{2a}	Nm	347	347	347	347	347	347	347	347	259	347	259			
					in.lb	3067	3067	3067	3067	3067	3067	3067	3067	2288	3067	2288			
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				T _{2B}	Nm	347	347	347	347	347	347	347	259	347	259				
					in.lb	3067	3067	3067	3067	3067	3067	3067	3067	2288	3067	2288			
Nominal torque (at n _{IN})				T _{2N}	Nm	243	259	257	277	243	277	277	277	207	277	207			
					in.lb	2146	2295	2277	2453	2153	2453	2453	2453	1830	2453	1830			
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				T _{2Not}	Nm	625	625	625	625	625	625	625	625	625	625	625			
					in.lb	5532	5532	5532	5532	5532	5532	5532	5532	5532	5532	5532			
Permitted average input speed (at T _{2N} and 20 °C ambient temperature) ^{d)}				n _{1N}	rpm	3100	3100	3100	3100	3100	3100	3100	3500	3500	4200	4200			
Max. input speed				n _{1Max}	rpm	6500	6500	6500	6500	6500	6500	6500	6500	6500	6500	6500			
Mean no load running torque ^{b)} (at n _r = 3000 rpm and 20 °C gearbox temperature)				T ₀₁₂	Nm	1.0	0.93	0.85	0.77	0.86	0.54	0.54	0.46	0.46	0.39	0.37			
					in.lb	9.2	8.2	7.5	6.8	7.6	4.8	4.8	4.1	4.1	3.5	3.3			
Max. backlash				j _t	arcmin	Standard ≤ 5 / Reduced ≤ 3													
Torsional rigidity ^{b)}				C _{t21}	Nm/arcmin	31													
					in.lb/arcmin	274													
Max. axial force ^{c)}				F _{2AMax}	N	5650													
					lb _f	1271													
Max. lateral force ^{c)}				F _{2QMax}	N	6600													
					lb _f	1485													
Max. tilting moment				M _{2KMax}	Nm	487													
					in.lb	4310													
Efficiency at full load				η	%	94													
Service life				L _h	h	> 20000													
Weight (incl. standard adapter plate)				m	kg	7.9													
					lb _m	17.5													
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				L _{PA}	dB(A)	≤ 56													
Max. permitted housing temperature					°C	+90													
					F	194													
Ambient temperature					°C	-15 to +40													
					F	5 to 104													
Lubrication						Lubricated for life													
Direction of rotation						In- and output same direction													
Protection class						IP 65													
Metal bellows coupling (recommended product type – validate sizing with cymex®)						BC2-00300AA032.000-X													
Bore diameter of coupling on the application side					mm	X = 024.000 - 060.000													
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request				C	14	J _I	kgcm ²	0.64	0.54	0.52	0.43	0.43	0.43	0.38	0.38	0.54	0.37	0.37	
							10 ⁻³ in.lb.s ²	0.57	0.48	0.46	0.38	0.38	0.38	0.34	0.34	0.48	0.33	0.33	
				E	19	J _I	kgcm ²	0.81	0.70	0.68	0.60	0.43	0.59	0.55	0.54	0.38	0.54	0.54	
							10 ⁻³ in.lb.s ²	0.72	0.62	0.60	0.53	0.38	0.52	0.49	0.48	0.34	0.48	0.48	
				G	24	J _I	kgcm ²	2.18	2.07	2.05	1.97	1.97	1.96	1.92	1.91	1.91	1.91	1.91	
							10 ⁻³ in.lb.s ²	1.93	1.83	1.81	1.74	1.74	1.73	1.70	1.69	1.69	1.69	1.69	
				H	28	J _I	kgcm ²	1.98	1.90	1.88	1.81	1.81	1.80	1.76	1.75	1.75	1.75	1.75	1.75
							10 ⁻³ in.lb.s ²	1.75	1.68	1.66	1.60	1.60	1.59	1.56	1.55	1.55	1.55	1.55	

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

2-stage




up to 14⁴⁾ (C)
clamping hub diameter

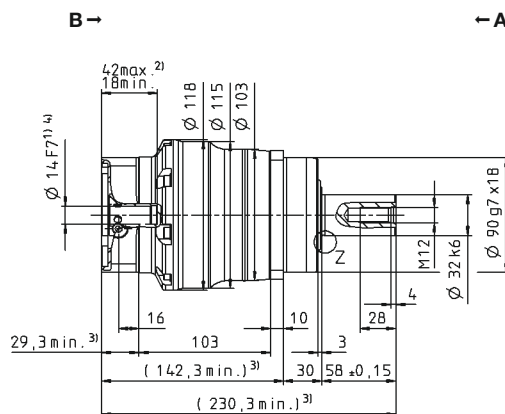

up to 19⁴⁾ (E)⁵⁾
clamping hub diameter

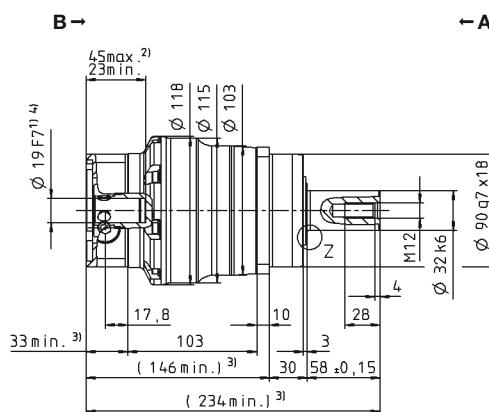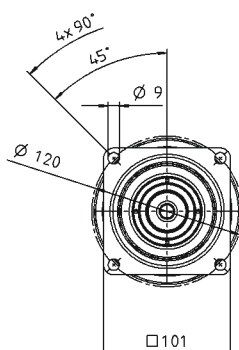


up to 24/28⁴⁾
(G/H) clamping
hub diameter

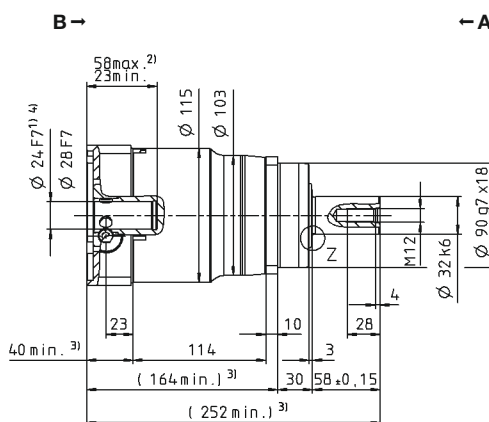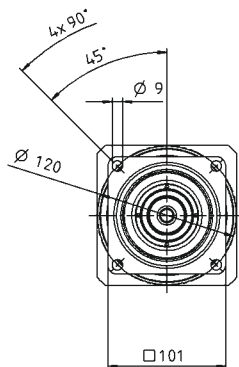


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions


¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter



SP⁺ 140 MF 1-stage

				1-stage							
Ratio				i		3	4	5	7	8	10
Max. torque ^{a) b) e)}				T _{2a}	Nm	624	1056	1056	825	720	720
					in.lb	5523	9346	9346	7302	6373	6373
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				T _{2B}	Nm	468	792	792	792	636	636
					in.lb	4142	7010	7010	7010	5629	5629
Nominal torque (at n _{1N})				T _{2N}	Nm	202	335	333	319	312	327
					in.lb	1786	2962	2944	2820	2763	2894
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				T _{2Not}	Nm	1250	1350	1350	1350	1250	1250
					in.lb	11064	11949	11949	11949	11064	11064
Permitted average input speed (at T _{2N} and 20 °C ambient temperature) ^{d)}				n _{1N}	rpm	2100	2100	2100	2600	2600	2600
Max. input speed				n _{1Max}	rpm	5000	5000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at n _i = 3000 rpm and 20 °C gearbox temperature)				T ₀₁₂	Nm	6.7	5.4	4.4	2.8	2.5	2.2
					in.lb	60	47	39	25	23	19
Max. backlash				j _t	arcmin	Standard ≤ 3 / Reduced ≤ 1					
Torsional rigidity ^{b)}				C _{i21}	Nm/arcmin	53					
					in.lb/arcmin	469					
Max. axial force ^{c)}				F _{2AMax}	N	9870					
					lb _f	2221					
Max. lateral force ^{c)}				F _{2QMax}	N	9900					
					lb _f	2228					
Max. tilting moment				M _{2KMax}	Nm	952					
					in.lb	8426					
Efficiency at full load				η	%	97					
Service life				L _h	h	> 20000					
Weight (incl. standard adapter plate)				m	kg	17.2					
					lb _m	38					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				L _{PA}	dB(A)	≤ 59					
Max. permitted housing temperature					°C	+90					
					F	194					
Ambient temperature					°C	-15 to +40					
					F	5 to 104					
Lubrication						Lubricated for life					
Direction of rotation						In- and output same direction					
Protection class						IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex®)						BC2-00800AA040.000-X					
					mm	X = 040.000 - 075.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	G	24	J _I	kgcm ²	10.7	7.82	6.79	5.84	5.28	5.28	
				10 ⁻³ in.lb.s ²	9.47	6.92	6.01	5.17	4.67	4.67	
	I	32	J _I	kgcm ²	13.8	11.0	9.95	9.00	8.44	8.44	
				10 ⁻³ in.lb.s ²	12.2	9.74	8.81	7.97	7.47	7.47	
	K	38	J _I	kgcm ²	14.9	12.1	11.0	10.1	9.51	9.51	
				10 ⁻³ in.lb.s ²	13.2	10.7	9.74	8.94	8.42	8.42	
	M	48	J _I	kgcm ²	29.5	26.7	25.6	24.7	24.2	24.2	
				10 ⁻³ in.lb.s ²	26.1	23.6	22.7	21.9	21.4	21.4	

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

1-stage





up to 24⁴⁾ (G)
clamping hub diameter

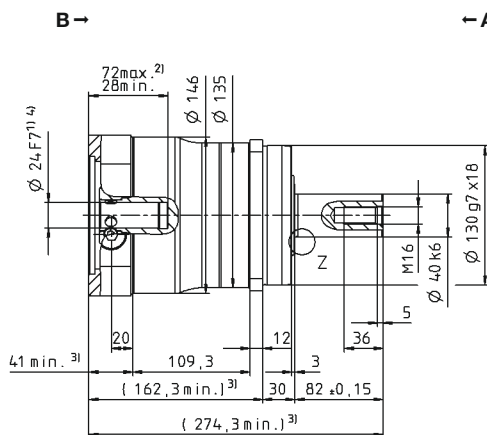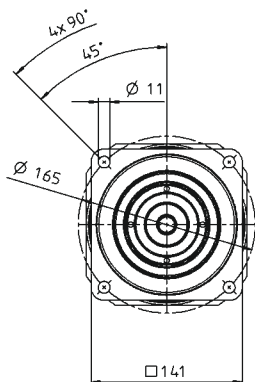

up to 32/38⁴⁾
(I/K⁵⁾) clamping
hub diameter

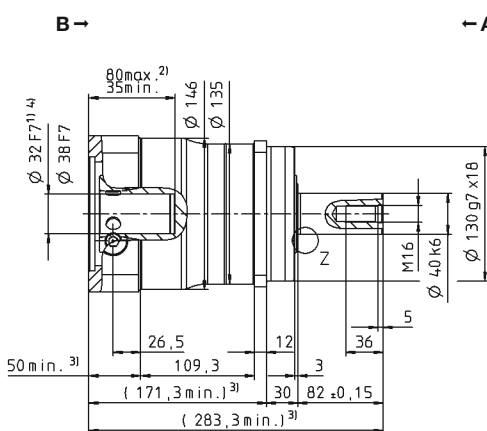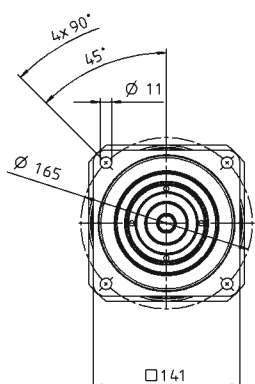


up to 48⁴⁾ (M)
clamping hub diameter

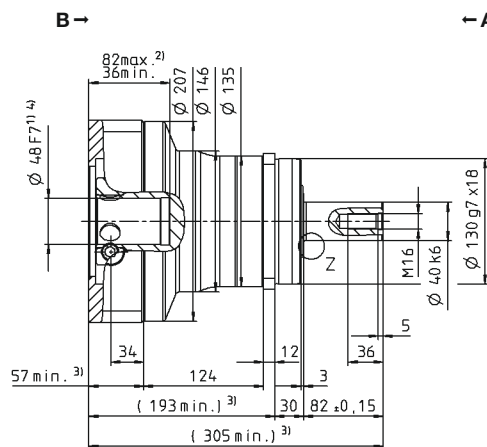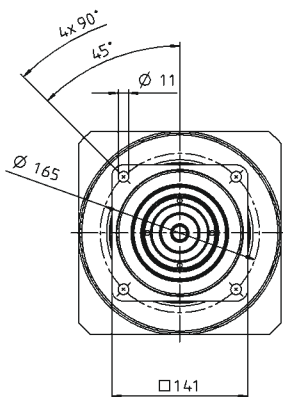


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 140 MF 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	726	726	670	726	726	670	726	670	583	726	583
				<i>in.lb</i>	6426	6426	5934	6426	6426	5934	6426	5934	5160	6426	5160
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	726	726	670	726	726	670	726	670	583	726	583
				<i>in.lb</i>	6426	6426	5934	6426	6426	5934	6426	5930	5164	6426	5160
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	461	493	489	545	464	536	581	536	466	581	466
				<i>in.lb</i>	4078	4361	4332	4824	4104	4747	5141	4747	4128	5141	4128
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	1350	1350	1350	1350	1350	1350	1350	1350	1350	1350	1250
				<i>in.lb</i>	11949	11949	11949	11949	11949	11949	11949	11949	11949	11949	11064
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	2900	2900	2900	2900	2900	2900	2900	3200	3200	3200	3900
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	2.4	2.1	2.0	1.8	1.6	1.2	1.2	1.1	1.1	0.88	0.80
				<i>in.lb</i>	21	19	17	16	14	11	11	9.4	9.4	7.8	7.1
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 5 / Reduced ≤ 3										
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	53										
				<i>in.lb/arcmin</i>	469										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	9870										
				<i>lb_f</i>	2221										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	9900										
				<i>lb_f</i>	2228										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	952										
				<i>in.lb</i>	8426										
Efficiency at full load			<i>η</i>	%	94										
Service life			<i>L</i> _h	<i>h</i>	> 20000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	17										
				<i>lb_m</i>	37.6										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 59										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	–15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00800AA040.000-X										
				<i>mm</i>	X = 040.000 - 075.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	E	19	<i>J</i> _i	<i>kgcm</i> ²	2.50	2.01	1.97	1.65	1.65	1.63	1.40	1.39	1.39	1.38	1.38
				10 ⁻³ <i>in.lb.s</i> ²	2.21	1.78	1.74	1.46	1.46	1.44	1.24	1.23	1.23	1.22	1.22
	G	24	<i>J</i> _i	<i>kgcm</i> ²	3.19	2.71	2.67	2.34	2.34	2.32	2.10	2.08	2.08	2.08	2.07
				10 ⁻³ <i>in.lb.s</i> ²	2.82	2.40	2.36	2.07	2.07	2.05	1.86	1.84	1.84	1.84	1.83
	K	38	<i>J</i> _i	<i>kgcm</i> ²	10.3	9.77	9.73	9.41	9.41	9.39	9.16	9.15	9.15	9.14	9.14
				10 ⁻³ <i>in.lb.s</i> ²	9.07	8.65	8.61	8.33	8.33	8.31	8.11	8.10	8.10	8.09	8.09

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

2-stage





up to 19⁴⁾ (E)
clamping hub
diameter

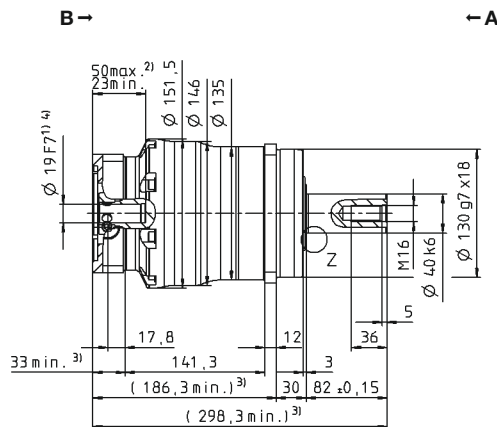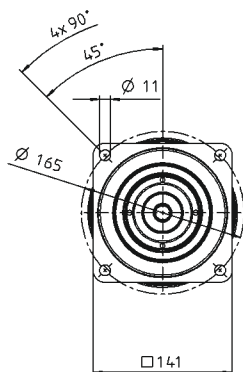

up to 24⁴⁾ (G)⁵⁾
clamping hub
diameter

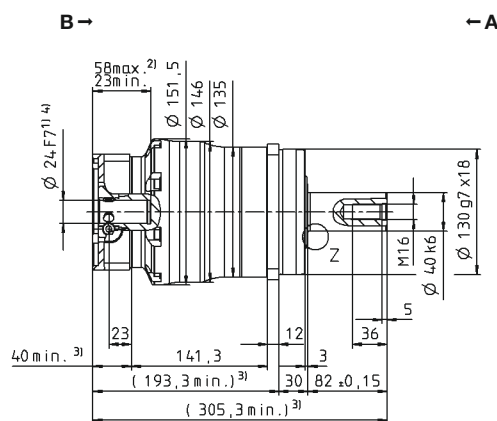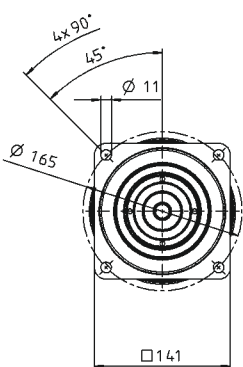


up to 38⁴⁾ (K)
clamping hub
diameter

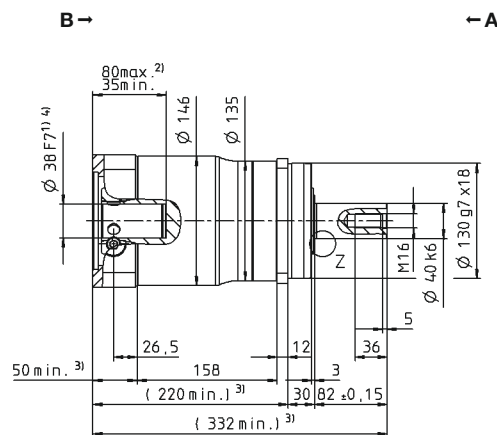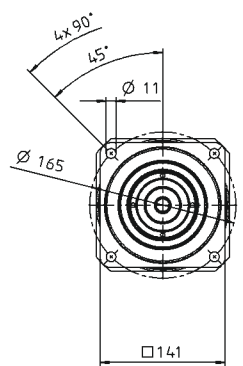


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 180 MF 1-stage

				1-stage					
Ratio	<i>i</i>			3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm		1552	1936	1936	1936	1552	1552
		in.lb		13736	17135	17135	17135	13736	13736
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)	T_{2B}	Nm		1164	1452	1452	1452	1164	1164
		in.lb		10302	12851	12851	12851	10302	10302
Nominal torque (at n_{IN})	T_{2N}	Nm		513	927	919	825	825	864
		in.lb		4544	8203	8134	7305	7305	7644
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm		2750	2750	2750	2750	2750	2750
		in.lb		24340	24340	24340	24340	24340	24340
Permitted average input speed (at T_{2N} and 20 °C ambient temperature) ^{d)}	n_{1N}	rpm		1500	1500	1500	2300	2300	2300
Max. input speed	n_{1Max}	rpm		4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm		15	12	8.0	5.6	5.6	3.8
		in.lb		135	103	71	50	50	34
Max. backlash	j_t	arcmin		Standard ≤ 3 / Reduced ≤ 1					
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin		175					
		in.lb/arcmin		1549					
Max. axial force ^{c)}	F_{2AMax}	N		15570					
		lb _f		3503					
Max. lateral force ^{c)}	F_{2QMax}	N		15400					
		lb _f		3465					
Max. tilting moment	M_{2KMax}	Nm		1600					
		in.lb		14161					
Efficiency at full load	η	%		97					
Service life	L_h	h		> 20000					
Weight (incl. standard adapter plate)	m	kg		34					
		lb _m		75.1					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)		≤ 62					
Max. permitted housing temperature		°C		+90					
		F		194					
Ambient temperature		°C		-15 to +40					
		F		5 to 104					
Lubrication				Lubricated for life					
Direction of rotation				In- and output same direction					
Protection class				IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex [®])				BC2-01500AA055.000-X					
Bore diameter of coupling on the application side		mm		X = 050.000 - 080.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	K	38	J_i	kgcm ²	50.8	33.9	27.9	22.2	19.2
				10 ⁻³ in.lb.s ²	45.0	30.0	24.7	19.7	17.0
	M	48	J_i	kgcm ²	58.2	41.2	35.3	29.6	26.5
				10 ⁻³ in.lb.s ²	51.5	36.5	31.2	26.2	23.5
	N	55	J_i	kgcm ²	65.7	49.7	44.0	38.5	35.4
				10 ⁻³ in.lb.s ²	58.1	44.0	38.9	34.1	31.3

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A




View B

1-stage





up to 38⁴⁾ (K)
clamping hub
diameter

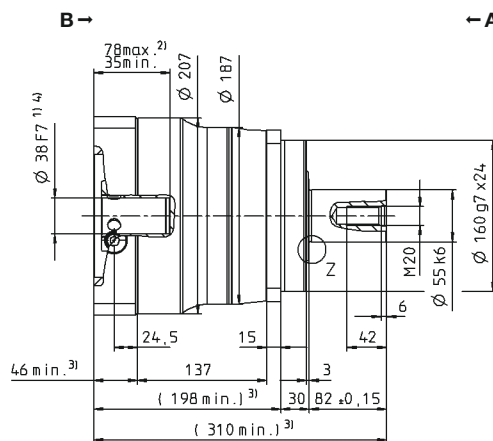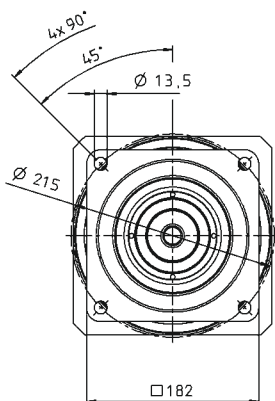

up to 48⁴⁾ (M)⁵⁾
clamping hub
diameter

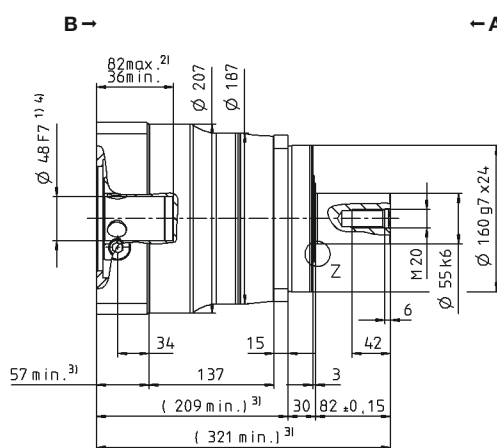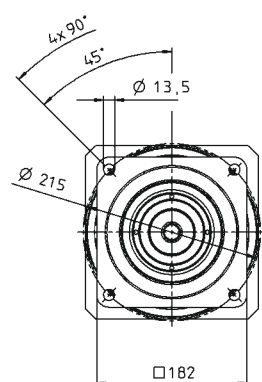


up to 55⁴⁾ (N)⁵⁾
clamping hub
diameter

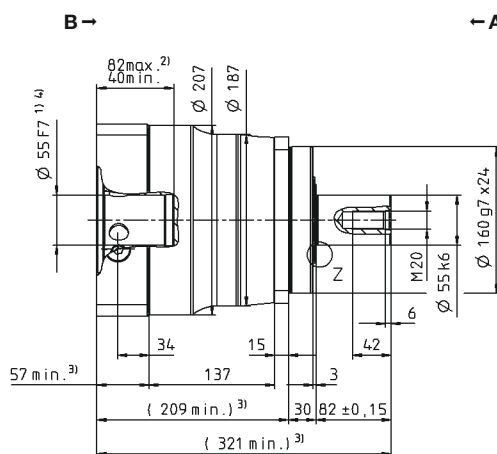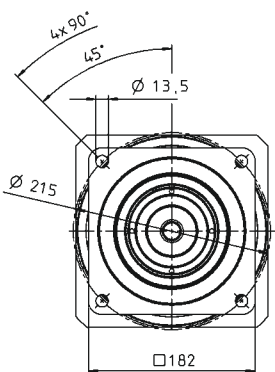


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 180 MF 2-stage

				2-stage														
Ratio				i		16	20	25	28	32	35	40	50	64	70	100		
Max. torque ^{a) b) e)}				T _{2a}	Nm	1485	1485	1857	1485	1485	1857	1485	1857	1238	1356	1238		
					in.lb	13146	13146	16432	13146	13146	16432	13146	16432	10955	12000	10955		
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				T _{2B}	Nm	1452	1452	1452	1452	1452	1452	1452	1452	1164	1356	1164		
					in.lb	12851	12851	12851	12851	12851	12851	12851	12851	10302	12002	10302		
Nominal torque (at n _{1N})				T _{2N}	Nm	1162	1162	1162	1162	1162	1162	1162	1162	931	1085	931		
					in.lb	10281	10281	10281	10281	10281	10281	10281	10281	8242	9600	8242		
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				T _{2Not}	Nm	2750	2750	2750	2750	2750	2750	2750	2750	2750	2750	2750		
					in.lb	24340	24340	24340	24340	24340	24340	24340	24340	24340	24340	24340	24340	
Permitted average input speed (at T _{2N} and 20 °C ambient temperature) ^{e)}				n _{1N}	rpm	2700	2700	2700	2700	2700	2700	2700	2900	2900	3200	3400		
Max. input speed				n _{1Max}	rpm	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000	5000		
Mean no load running torque ^{b)} (at n ₁ = 3000 rpm and 20 °C gearbox temperature)				T ₀₁₂	Nm	4.7	3.9	3.6	3.3	3.3	2.8	2.2	1.9	1.9	1.8	1.8		
					in.lb	42	35	32	29	29	25	20	17	17	16	16		
Max. backlash				j _t	arcmin	Standard ≤ 5 / Reduced ≤ 3												
Torsional rigidity ^{b)}				C _{i21}	Nm/arcmin	175												
					in.lb/arcmin	1549												
Max. axial force ^{c)}				F _{2AMax}	N	15570												
					lb _f	3503												
Max. lateral force ^{c)}				F _{2QMax}	N	15400												
					lb _f	3465												
Max. tilting moment				M _{2KMax}	Nm	1600												
					in.lb	14161												
Efficiency at full load				η	%	94												
Service life				L _n	h	> 20000												
Weight (incl. standard adapter plate)				m	kg	36.4												
					lb _m	80.4												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])				L _{PA}	dB(A)	≤ 58												
Max. permitted housing temperature					°C	+90												
					F	194												
Ambient temperature					°C	−15 to +40												
					F	5 to 104												
Lubrication						Lubricated for life												
Direction of rotation						In- and output same direction												
Protection class						IP 65												
Metal bellows coupling (recommended product type – validate sizing with cymex [®])						BC2-01500AA055.000-X												
Bore diameter of coupling on the application side					mm	X = 050.000 - 080.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request				G	24	J _i	kgcm ²	9.27	7.72	7.48	6.32	6.32	6.20	5.51	5.45	5.45	5.39	5.36
							10 ⁻³ in.lb.s ²	8.20	6.83	6.62	5.59	5.59	5.49	4.88	4.82	4.82	4.77	4.74
				I	32	J _i	kgcm ²	12.4	10.9	10.6	9.48	9.48	9.36	8.67	9.68	8.55	8.55	8.52
							10 ⁻³ in.lb.s ²	11.0	9.63	9.42	8.39	8.39	8.28	7.67	8.57	7.57	7.57	7.54
				K	38	J _i	kgcm ²	13.5	12.0	11.7	10.6	10.6	10.4	9.74	9.68	9.68	9.63	9.60
							10 ⁻³ in.lb.s ²	12.0	10.6	10.4	9.34	9.34	9.23	8.62	8.57	8.57	8.52	8.50
				M	48	J _i	kgcm ²	28.1	26.6	26.3	25.2	25.2	25.1	24.4	24.3	24.3	24.3	24.3
							10 ⁻³ in.lb.s ²	24.9	23.5	23.3	22.3	22.3	22.2	21.6	21.5	21.5	21.5	21.5

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2OMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures


^{e)} Smooth shaft

View A


View B

2-stage


up to 24⁴⁾ (G)
clamping hub diameter

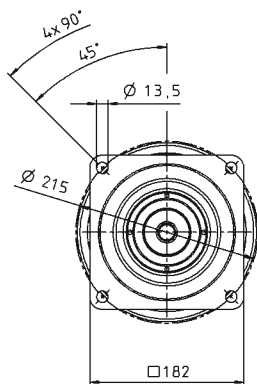








up to 32/38⁴⁾
(I/K⁵⁾) clamping
hub diameter

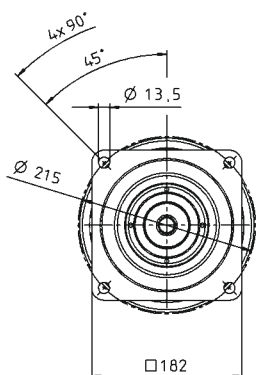

up to 48⁴⁾ (M)
clamping hub diameter

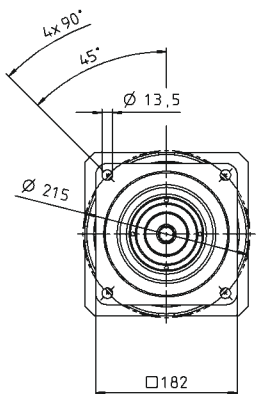


Motor shaft diameter [mm]

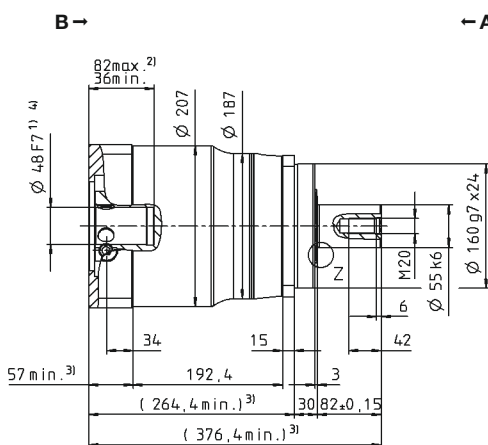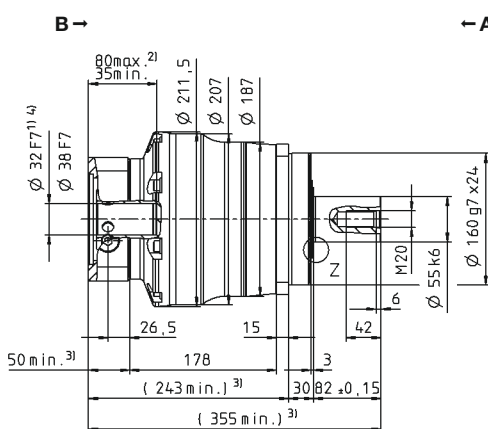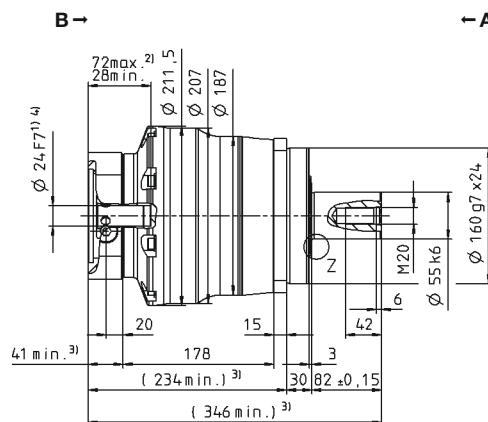


Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP+ 210 MF 1-stage

			1-stage					
Ratio	<i>i</i>		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	2560	4000	4000	3840	2800	2800
		in.lb	22658	35403	35403	33987	24782	24782
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)	T_{2B}	Nm	1920	3000	3000	2880	2280	2280
		in.lb	16994	26552	26552	25490	20180	20180
Nominal torque (at n_n)	T_{2N}	Nm	1536	1895	1767	1731	1631	1708
		in.lb	13595	16772	15641	15323	14432	15122
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	5900	5900	5900	5900	5900	5900
		in.lb	52220	52220	52220	52220	52220	52220
Permitted average input speed (at T_{2N} and 20 °C ambient temperature) ^{d)}	n_{1N}	rpm	1200	1200	1500	1700	2000	2000
Max. input speed	n_{1Max}	rpm	3000	3000	3000	3000	3000	3000
Mean no load running torque ^{b)} (at $n_1 = 2000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	26	19	15	8.8	8.8	6.4
		in.lb	227	164	129	78	78	57
Max. backlash	j_t	arcmin	Standard ≤ 3 / Reduced ≤ 1					
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	400					
		in.lb/arcmin	3540					
Max. axial force ^{c)}	F_{2AMax}	N	30000					
		lb _f	6750					
Max. lateral force ^{c)}	F_{2QMax}	N	21000					
		lb _f	4725					
Max. tilting moment	M_{2KMax}	Nm	3100					
		in.lb	27437					
Efficiency at full load	η	%	97					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	56					
		lb _m	123.8					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 64					
Max. permitted housing temperature		°C	+90					
		F	194					
Ambient temperature		°C	-15 to +40					
		F	5 to 104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex [®])			BC2-04000AA075.000-X					
Bore diameter of coupling on the application side		mm	X = 050.000 - 090.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	N 55 J_1	kgcm ²	139	94.3	76.9	61.5	61.5	53.1
		10 ⁻³ in.lb.s ²	123	83.5	68.1	54.4	54.4	47.0

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}




^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange



^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft

up to 55 ⁴⁾ (N) ⁵⁾
clamping hub
diameter

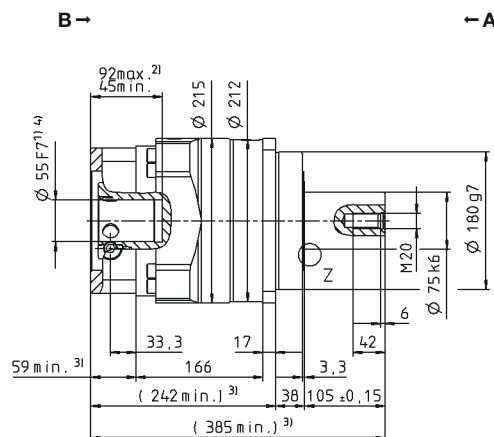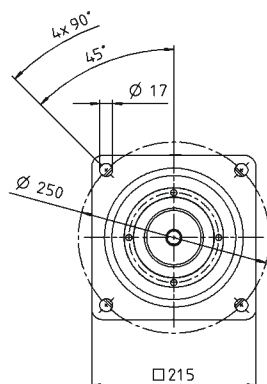 $\frac{d}{ds}$

MF

⁵⁾ Standard clamping hub diameter

SP⁺ 210 MF 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	3159	3159	3949	3159	3159	3840	2880	3600	2043	2457	2043
				<i>in.lb</i>	27958	27958	34947	27958	27958	33987	25490	31863	18081	21745	18081
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	2880	3000	3000	2880	2880	2880	2840	2880	2043	2457	2043
				<i>in.lb</i>	25490	26552	26552	25490	25490	25490	25136	25490	18081	21745	18081
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	1274	1266	1567	1294	2200	1599	1358	1679	1634	1965	1634
				<i>in.lb</i>	11277	11205	13873	11452	19474	14150	12019	14861	14465	17396	14465
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900
				<i>in.lb</i>	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	2500	2500	2500	2500	2500	2500	2500	2500	2500	3000	3000
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at <i>n</i> _i = 2000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	5.6	5.2	4.8	4.5	4.5	3.6	3.4	3.0	3.0	2.6	2.4
				<i>in.lb</i>	50	46	43	39	39	32	30	27	27	23	21
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 5 / Reduced ≤ 3										
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	400										
				<i>in.lb/arcmin</i>	3540										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	30000										
				<i>lb_f</i>	6750										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	21000										
				<i>lb_f</i>	4725										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	3100										
				<i>in.lb</i>	27437										
Efficiency at full load			<i>η</i>	%	94										
Service life			<i>L</i> _h	<i>h</i>	> 20000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	53										
				<i>lb_m</i>	117										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 57										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	-15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-04000AA075.000-X										
Bore diameter of coupling on the application side				<i>mm</i>	X = 050.000 - 090.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	M	48	<i>J</i> _i	<i>kgcm²</i>	34.5	31.5	30.8	30.0	30.0	29.7	28.5	28.3	28.3	28.1	28.0
				<i>10⁻³ in.lb.s²</i>	30.5	27.9	27.3	26.6	26.6	26.3	25.2	25.0	25.0	24.9	24.8

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures



^{e)} Smooth shaft

View A

View B

Motor shaft diameter [mm]

2-stage

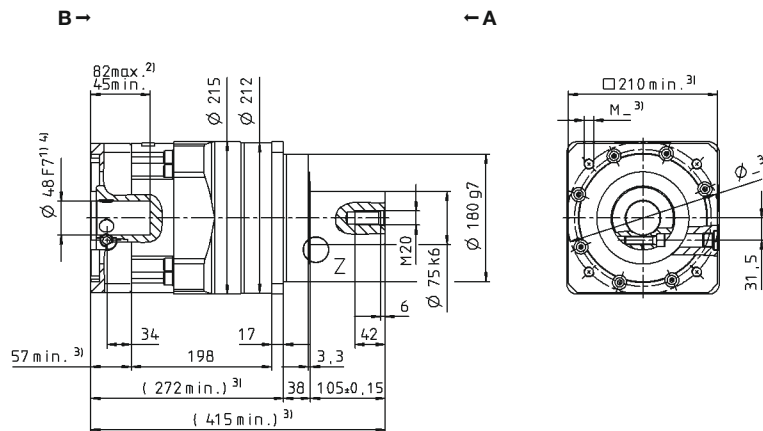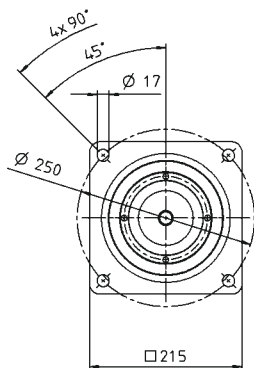up to 48 ⁴⁾ (M) ⁵⁾
clamping hub
diameter


Planetary gearboxes




SP

MF

Other output variants

Shaft with key

Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP+ 240 MF 1-stage

			1-stage					
Ratio	<i>i</i>		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	4400	5700	5700	5700	4000	4000
		in.lb	38944	50450	50450	50450	35403	35403
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)	T_{2B}	Nm	3300	5400	5400	5160	4000	4000
		in.lb	29208	47794	47794	45670	35403	35403
Nominal torque (at n_{IN})	T_{2N}	Nm	2333	3038	2872	2737	2611	2735
		in.lb	20651	26885	25418	24223	23111	24208
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	6850	8500	8500	8500	6850	6850
		in.lb	60628	75232	75232	75232	60628	60628
Permitted average input speed (at T_{2N} and 20 °C ambient temperature) ^{d)}	n_{1N}	rpm	1000	1000	1200	1500	1700	1700
Max. input speed	n_{1Max}	rpm	3000	3000	3000	3000	3000	3000
Mean no load running torque ^{b)} (at $n_1 = 2000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	32	24	19	12	12	8.0
		in.lb	283	212	164	106	106	71
Max. backlash	j_t	arcmin	Standard ≤ 3 / Reduced ≤ 1					
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	550					
		in.lb/arcmin	4868					
Max. axial force ^{c)}	F_{2AMax}	N	33000					
		lb _f	7425					
Max. lateral force ^{c)}	F_{2QMax}	N	30000					
		lb _f	6750					
Max. tilting moment	M_{2KMax}	Nm	5000					
		in.lb	44254					
Efficiency at full load	η	%	97					
Service life	L_h	h	> 20000					
Weight (incl. standard adapter plate)	m	kg	77					
		lb _m	170.2					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 66					
Max. permitted housing temperature		°C	+90					
		F	194					
Ambient temperature		°C	-15 to +40					
		F	5 to 104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex [®])			BC2-06000AA085.000-X					
Bore diameter of coupling on the application side		mm	X = 060.000 - 140.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	O 60 J_1	kgcm ²	260	198	163	138	138	125
		10 ⁻³ in.lb.s ²	230	175	144	122	122	110

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft

Motor shaft diameter [mm]

1-stage


up to 60 ⁴⁾ (O) ⁵⁾
clamping hub
diameter

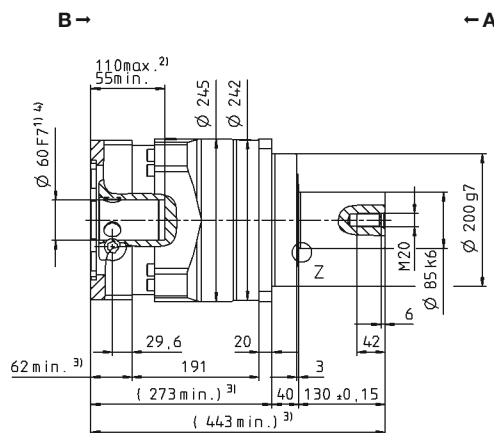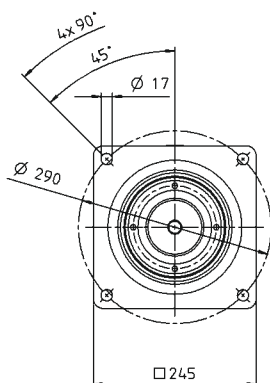 $\frac{d}{ds}$



MF

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit

2) Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 240 MF 2-stage

				2-stage												
Ratio				<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}				<i>T</i> _{2a}	<i>Nm</i>	5446	5446	5700	5446	5446	5700	5446	5700	3642	5700	3642
					<i>in.lb</i>	48202	48202	50450	48202	48202	50450	48202	50450	32236	50450	32236
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				<i>T</i> _{2B}	<i>Nm</i>	5400	5400	5400	5400	5400	5400	4400	5160	3642	4730	3642
					<i>in.lb</i>	47794	47794	47794	47794	47794	38944	45670	32236	41864	32236	
Nominal torque (at <i>n</i> _{IN})				<i>T</i> _{2N}	<i>Nm</i>	2658	2596	3198	2667	3754	3283	2803	3457	2914	3784	2914
					<i>in.lb</i>	23524	22976	28308	23607	33222	29060	24811	30600	25789	33491	25789
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				<i>T</i> _{2Not}	<i>Nm</i>	8500	8500	8500	8500	8500	8500	8500	8500	6850	8500	6850
					<i>in.lb</i>	75232	75232	75232	75232	75232	75232	75232	75232	60628	75232	60628
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}				<i>n</i> _{1N}	<i>rpm</i>	2300	2500	2500	2500	2500	2500	2500	2500	2500	2800	2800
Max. input speed				<i>n</i> _{1Max}	<i>rpm</i>	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 2000 rpm and 20 °C gearbox temperature)				<i>T</i> ₀₁₂	<i>Nm</i>	8.4	7.1	6.5	5.9	5.9	4.5	4.1	3.5	3.5	3.0	3.0
					<i>in.lb</i>	74	63	58	52	52	40	36	31	31	26	26
Max. backlash				<i>j</i> _t	<i>arcmin</i>	Standard ≤ 5 / Reduced ≤ 3										
Torsional rigidity ^{b)}				<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	550										
					<i>in.lb/arcmin</i>	4868										
Max. axial force ^{c)}				<i>F</i> _{2AMax}	<i>N</i>	33000										
					<i>lb_f</i>	7425										
Max. lateral force ^{c)}				<i>F</i> _{2QMax}	<i>N</i>	30000										
					<i>lb_f</i>	6750										
Max. tilting moment				<i>M</i> _{2KMax}	<i>Nm</i>	5000										
					<i>in.lb</i>	44254										
Efficiency at full load				<i>η</i>	%	94										
Service life				<i>L</i> _h	<i>h</i>	> 20000										
Weight (incl. standard adapter plate)				<i>m</i>	<i>kg</i>	76										
					<i>lb_m</i>	168										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				<i>L</i> _{PA}	<i>dB(A)</i>	≤ 58										
Max. permitted housing temperature					°C	+90										
					<i>F</i>	194										
Ambient temperature					°C	–15 to +40										
					<i>F</i>	5 to 104										
Lubrication						Lubricated for life										
Direction of rotation						In- and output same direction										
Protection class						IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)						BC2-06000AA085.000-X										
						X = 060.000 - 140.000										
Bore diameter of coupling on the application side					<i>mm</i>	X = 060.000 - 140.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm] Optimized mass inertia version available on request	M	48	<i>J</i> _i		<i>kgcm²</i>	39.2	34.6	33.2	30.5	30.5	29.7	28.2	27.9	27.6	27.6	27.5
					<i>10⁻³ in.lb.s²</i>	34.7	30.6	29.4	27.0	27.0	26.3	25.0	24.7	24.4	24.4	24.3

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com


^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft



MF

SP⁺ 075 MC 1-stage

			1-stage					
Ratio	<i>i</i>		3	4	5	7	8	10
Max. torque ^{a) b) e)}	T_{2a}	Nm	68	90	90	90	70	70
		in.lb	602	797	797	797	620	620
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)	T_{2B}	Nm	68	90	90	90	70	70
		in.lb	602	797	797	797	620	620
Nominal torque (at n_{IN})	T_{2N}	Nm	41	51	51	52	50	53
		in.lb	362	448	447	459	441	468
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)	T_{2Not}	Nm	139	185	250	250	213	213
		in.lb	1230	1640	2213	2213	1885	1885
Permitted average input speed (at T_{2N} and 20 °C ambient temperature) ^{d)}	n_{1N}	rpm	4500	4500	4500	4500	4500	4500
Max. input speed	n_{1Max}	rpm	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at $n_i = 3000$ rpm and 20 °C gearbox temperature)	T_{012}	Nm	1.1	0.88	0.72	0.49	0.42	0.40
		in.lb	9.9	7.8	6.4	4.3	3.7	3.5
Max. backlash	j_t	arcmin	Standard ≤ 6 / Reduced ≤ 4					
Torsional rigidity ^{b)}	C_{121}	Nm/arcmin	10					
		in.lb/arcmin	89					
Max. axial force ^{c)}	F_{2AMax}	N	3350					
		lb _f	754					
Max. lateral force ^{c)}	F_{2QMax}	N	4200					
		lb _f	945					
Max. tilting moment	M_{2KMax}	Nm	236					
		in.lb	2089					
Efficiency at full load	η	%	98.5					
Service life	L_h	h	> 30000					
Weight (incl. standard adapter plate)	m	kg	3.9					
		lb _m	8.6					
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])	L_{PA}	dB(A)	≤ 59					
Max. permitted housing temperature		°C	+90					
		F	194					
Ambient temperature		°C	-15 to +40					
		F	5 to 104					
Lubrication			Lubricated for life					
Direction of rotation			In- and output same direction					
Protection class			IP 65					
Metal bellows coupling (recommended product type – validate sizing with cymex [®])			BC2-00080AA022.000-X					
Bore diameter of coupling on the application side		mm	X = 014.000 - 042.000					
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E 19	J_i	kgcm ²	1.03	0.78	0.68	0.59	0.54
			10 ⁻³ in.lb.s ²	0.91	0.69	0.60	0.52	0.48
	G 24	J_i	kgcm ²	2.40	2.15	2.05	1.96	1.91
			10 ⁻³ in.lb.s ²	2.12	1.90	1.81	1.73	1.69

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B




1-stage

up to 19⁴⁾ (E)⁵⁾
clamping hub
diameter

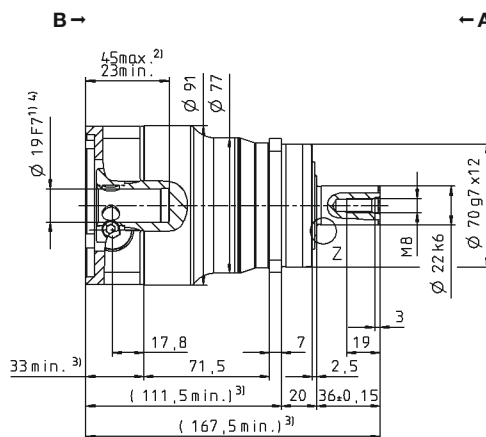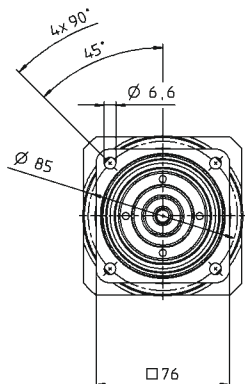

Motor shaft diameter [mm]

up to 24⁴⁾ (G)
clamping hub
diameter

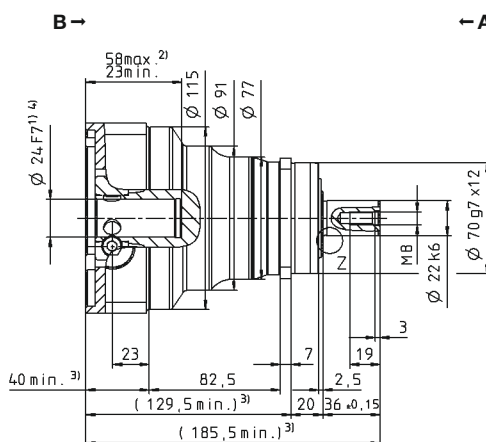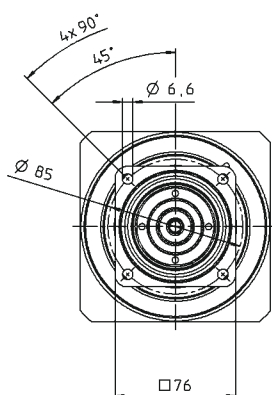


SP


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 075 MC 2-stage

				2-stage											
Ratio		<i>i</i>		16	20	25	28	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		<i>T</i> _{2a}	Nm	90	90	90	90	90	90	90	90	70	90	70	
			in.lb	797	797	797	797	797	797	797	797	620	797	620	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)		<i>T</i> _{2B}	Nm	90	90	90	90	90	90	90	90	70	90	70	
			in.lb	797	797	797	797	797	797	797	797	620	797	620	
Nominal torque (at <i>n</i> _{IN})		<i>T</i> _{2N}	Nm	62	62	72	65	72	72	65	72	56	72	56	
			in.lb	552	553	637	572	637	637	574	637	496	637	496	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		<i>T</i> _{2Not}	Nm	250	250	250	250	250	250	250	250	213	250	213	
			in.lb	2213	2213	2213	2213	2213	2213	2213	2213	1885	2213	1885	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}		<i>n</i> _{1N}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed		<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)		<i>T</i> ₀₁₂	Nm	0.36	0.24	0.18	0.18	0.17	0.16	0.16	0.16	0.16	0.15	0.14	
			in.lb	3.2	2.1	1.6	1.6	1.5	1.4	1.4	1.4	1.4	1.3	1.2	
Max. backlash		<i>j</i> _t	arcmin	Standard ≤ 8 / Reduced ≤ 6											
Torsional rigidity ^{b)}		<i>C</i> ₁₂₁	Nm/arcmin	10											
			in.lb/arcmin	89											
Max. axial force ^{c)}		<i>F</i> _{2AMax}	N	3350											
			lb _f	754											
Max. lateral force ^{c)}		<i>F</i> _{2QMax}	N	4200											
			lb _f	945											
Max. tilting moment		<i>M</i> _{2KMax}	Nm	236											
			in.lb	2089											
Efficiency at full load		<i>η</i>	%	96.5											
Service life		<i>L</i> _h	h	> 30000											
Weight (incl. standard adapter plate)		<i>m</i>	kg	3.6											
			lb _m	8.0											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		<i>L</i> _{PA}	dB(A)	≤ 55											
Max. permitted housing temperature			°C	+90											
			F	194											
Ambient temperature			°C	-15 to +40											
			F	5 to 104											
Lubrication				Lubricated for life											
Direction of rotation				In- and output same direction											
Protection class				IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex®)				BC2-00080AA022.000-X											
		Bore diameter of coupling on the application side	mm	X = 014.000 - 042.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	C	14	<i>J</i> ₁	kgcm ²	0.23	0.20	0.20	0.18	0.18	0.18	0.16	0.16	0.16	0.16	0.16
				10 ⁻³ in.lb.s ²	0.20	0.18	0.18	0.16	0.16	0.16	0.14	0.14	0.14	0.14	0.14
	E	19	<i>J</i> ₁	kgcm ²	0.55	0.53	0.52	0.50	0.50	0.50	0.49	0.49	0.49	0.49	0.49
				10 ⁻³ in.lb.s ²	0.49	0.47	0.46	0.44	0.44	0.44	0.43	0.43	0.43	0.43	0.43

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures







^{e)} Smooth shaft

View A

View B

2-stage

up to 14 ⁴⁾ (C) ⁵⁾
clamping hub
diameter

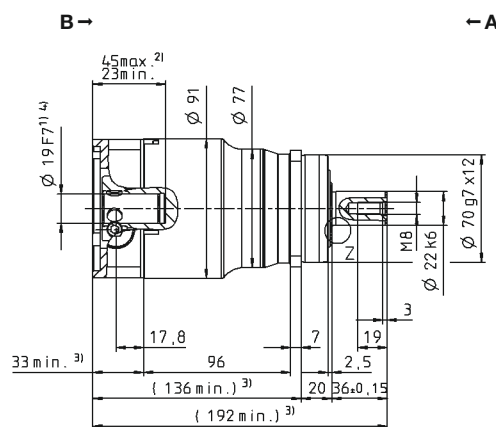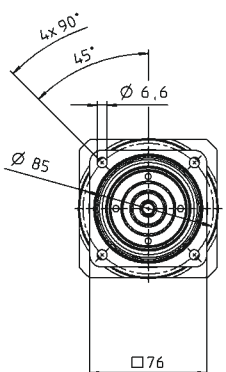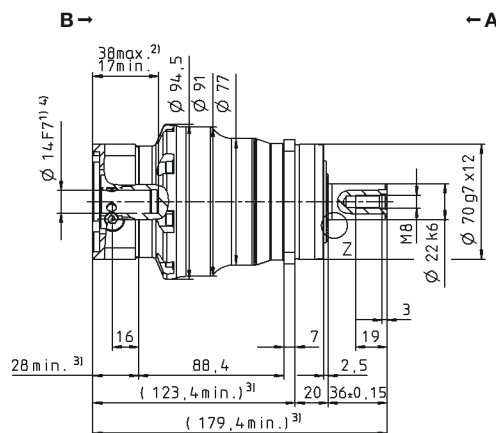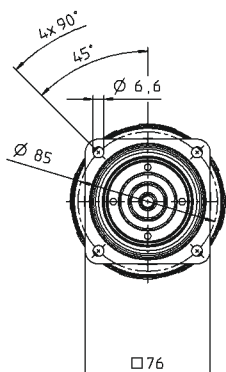

Motor shaft diameter [mm]

up to 19 ⁴⁾ (E)
clamping hub
diameter


SP

MC


Planetary gearboxes

Other output variants


Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions


¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter



SP⁺ 100 MC 1-stage

				Standard version MC						Friction optimized version L						
Ratio			<i>i</i>		3	4	5	7	8	10	3	4	5	7	8	10
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	180	240	240	240	180	180	180	240	240	240	180	180
				<i>in.lb</i>	1593	2124	2124	2124	1593	1593	1593	2124	2124	2124	1593	1593
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	180	240	240	240	180	180	180	240	240	240	180	180
				<i>in.lb</i>	1593	2124	2124	2124	1593	1593	1593	2124	2124	2124	1593	1593
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	76	95	91	93	93	97	76	95	91	93	93	97
				<i>in.lb</i>	677	838	806	823	821	861	677	838	806	823	821	861
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	454	625	625	625	599	599	454	625	625	625	599	599
				<i>in.lb</i>	4016	5532	5532	5532	5302	5302	4016	5532	5532	5532	5302	5302
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	3500	4000	4500	4500	4500	4500	3500	4000	4500	4500	4500	4500
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	2.0	1.8	1.4	0.84	0.78	0.64	0.9	0.8	0.6	0.5	0.4	0.4
				<i>in.lb</i>	17	16	12	7.4	6.9	5.7	8.0	7.1	5.3	4.4	3.5	3.5
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 4 / Reduced ≤ 2											
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	31											
				<i>in.lb/arcmin</i>	274											
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	5650						2000					
				<i>lb_f</i>	1271						450					
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	6600						1000					
				<i>lb_f</i>	1485						225					
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	487						72					
				<i>in.lb</i>	4310						637					
Efficiency at full load			<i>η</i>	%	98.5						99					
Service life			<i>L</i> _h	<i>h</i>	> 30000											
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	7.7											
				<i>lb_m</i>	17											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 58											
Max. permitted housing temperature				°C	+90											
				<i>F</i>	194											
Ambient temperature				°C	–15 to +40											
				<i>F</i>	5 to 104											
Lubrication					Lubricated for life											
Direction of rotation					In- and output same direction											
Protection class					IP 65						IP 52					
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00300AA032.000-X											
				<i>mm</i>	X = 024.000 - 060.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	<i>J</i> _i	<i>kgcm²</i>	3.99	3.04	2.61	2.29	2.26	2.07	3.99	3.04	2.61	2.29	2.26	2.07
				<i>10⁻³ in.lb.s²</i>	3.53	2.69	2.31	2.03	2.00	1.83	3.53	2.69	2.31	2.03	2.00	1.83
	K	38	<i>J</i> _i	<i>kgcm²</i>	11.1	10.1	9.68	9.36	9.55	9.14	11.1	10.1	9.68	9.36	9.55	9.14
				<i>10⁻³ in.lb.s²</i>	9.82	8.94	8.57	8.28	8.45	8.09	9.82	8.94	8.57	8.28	8.45	8.09

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange







^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft

up to 24 ⁴⁾ (G) ⁵⁾
clamping hub
diameter

Motor shaft diameter [mm]


up to 38⁴⁾ (K)
clamping hub
diameter

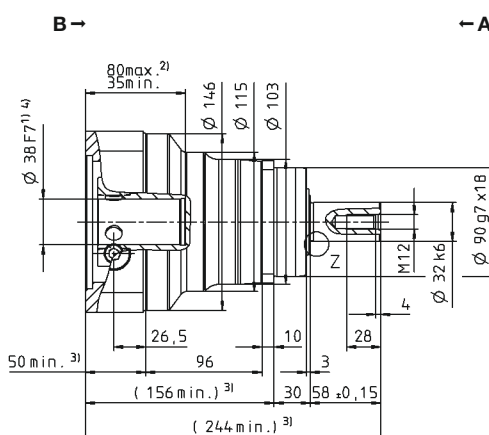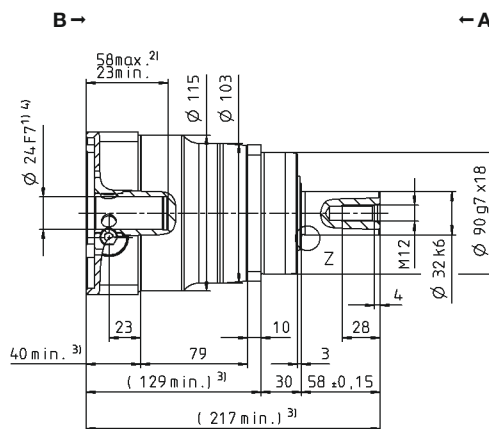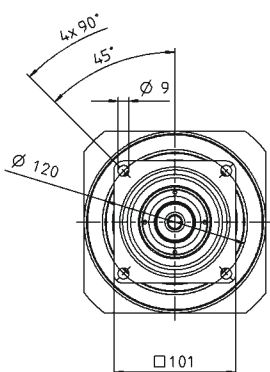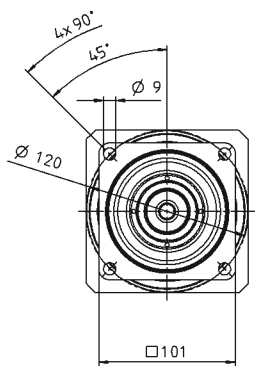 $\frac{d}{dt}$


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit

2) Min. / Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 100 MC 2-stage

				2-stage											
Ratio		<i>i</i>		16	20	25	28	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		<i>T</i> _{2a}	<i>Nm</i>	240	240	240	240	240	240	240	240	180	240	180	
			<i>in.lb</i>	2124	2124	2124	2124	2124	2124	2124	2124	1593	2124	1593	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)		<i>T</i> _{2B}	<i>Nm</i>	240	240	240	240	240	240	240	240	180	240	180	
			<i>in.lb</i>	2124	2124	2124	2124	2124	2124	2124	2124	1593	2124	1593	
Nominal torque (at <i>n</i> _N)		<i>T</i> _{2N}	<i>Nm</i>	138	148	149	164	141	164	183	182	144	189	144	
			<i>in.lb</i>	1221	1313	1322	1453	1251	1450	1617	1614	1275	1673	1273	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		<i>T</i> _{2Not}	<i>Nm</i>	625	625	625	625	625	625	625	625	599	625	599	
			<i>in.lb</i>	5532	5532	5532	5532	5532	5532	5532	5532	5302	5532	5302	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}		<i>n</i> _{1N}	<i>rpm</i>	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed		<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)		<i>T</i> ₀₁₂	<i>Nm</i>	0.52	0.53	0.48	0.43	0.38	0.28	0.40	0.25	0.25	0.20	0.19	
			<i>in.lb</i>	4.6	4.7	4.2	3.8	3.4	2.5	3.5	2.2	2.2	1.8	1.7	
Max. backlash		<i>j</i> _t	<i>arcmin</i>	Standard ≤ 6 / Reduced ≤ 4											
Torsional rigidity ^{b)}		<i>C</i> _{t21}	<i>Nm/arcmin</i>	31											
			<i>in.lb/arcmin</i>	274											
Max. axial force ^{c)}		<i>F</i> _{2AMax}	<i>N</i>	5650											
			<i>lb_f</i>	1271											
Max. lateral force ^{c)}		<i>F</i> _{2QMax}	<i>N</i>	6600											
			<i>lb_f</i>	1485											
Max. tilting moment		<i>M</i> _{2KMax}	<i>Nm</i>	487											
			<i>in.lb</i>	4310											
Efficiency at full load		<i>η</i>	%	96.5											
Service life		<i>L</i> _h	<i>h</i>	> 30000											
Weight (incl. standard adapter plate)		<i>m</i>	<i>kg</i>	7.9											
			<i>lb_m</i>	17.5											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		<i>L</i> _{PA}	<i>dB(A)</i>	≤ 56											
Max. permitted housing temperature			°C	+90											
			<i>F</i>	194											
Ambient temperature			°C	-15 to +40											
			<i>F</i>	5 to 104											
Lubrication				Lubricated for life											
Direction of rotation				In- and output same direction											
Protection class				IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex®)				BC2-00300AA032.000-X											
			<i>mm</i>	X = 024.000 - 060.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	E	19	<i>J</i> _i	<i>kgcm²</i>	0.81	0.70	0.68	0.60	0.43	0.59	0.55	0.54	0.38	0.54	0.54
				<i>10⁻³ in.lb.s²</i>	0.72	0.62	0.60	0.53	0.38	0.52	0.49	0.48	0.34	0.48	0.48
	G	24	<i>J</i> _i	<i>kgcm²</i>	2.18	2.07	2.05	1.97	2.06	1.96	1.92	1.91	1.91	1.91	1.91
				<i>10⁻³ in.lb.s²</i>	1.93	1.83	1.81	1.74	1.82	1.73	1.70	1.69	1.69	1.69	1.69

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B




2-stage

up to 19 ⁴⁾ (E) ⁵⁾
clamping hub
diameter

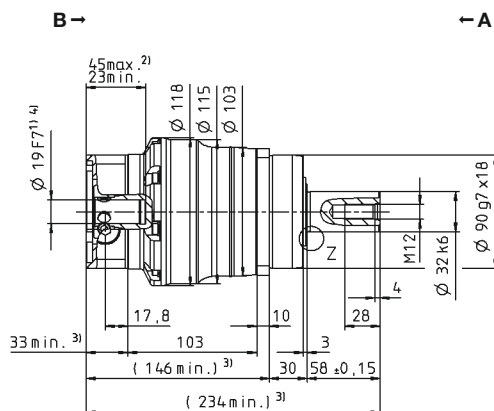

Motor shaft diameter [mm]

up to 24 ⁴⁾ (G)
clamping hub
diameter

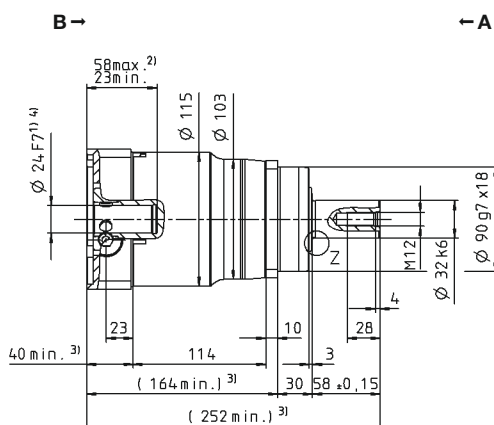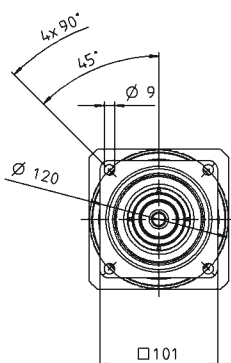


Planetary gearboxes

SP


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 140 MC 1-stage

				Standard version MC						Friction optimized version L								
Ratio				<i>i</i>		3	4	5	7	8	10	3	4	5	7	8	10	
Max. torque ^{a) b) e)}				<i>T</i> _{2a}	<i>Nm</i>	310	480	480	480	380	380	310	480	480	480	380	380	
					<i>in.lb</i>	2744	4248	4248	4248	3363	3363	2744	4248	4248	4248	3363	3363	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)				<i>T</i> _{2B}	<i>Nm</i>	310	480	480	480	380	380	310	480	480	480	380	380	
					<i>in.lb</i>	2744	4248	4248	4248	3363	3363	2744	4248	4248	4248	3363	3363	
Nominal torque (at <i>n</i> _{IN})				<i>T</i> _{2N}	<i>Nm</i>	127	195	182	187	186	195	127	195	182	187	186	195	
					<i>in.lb</i>	1122	1730	1612	1656	1644	1727	1122	1730	1612	1656	1644	1727	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)				<i>T</i> _{2Not}	<i>Nm</i>	1250	1350	1350	1350	1250	1250	1250	1350	1350	1350	1250	1250	
					<i>in.lb</i>	11064	11949	11949	11949	11064	11064	11064	11949	11949	11949	11064	11064	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}				<i>n</i> _{1N}	<i>rpm</i>	3000	3500	4500	4500	4500	4500	3000	3500	4500	4500	4500	4500	
Max. input speed				<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)				<i>T</i> ₀₁₂	<i>Nm</i>	4.1	3.5	2.8	2.2	1.8	1.7	2.0	1.5	1.2	1.0	0.9	0.9	
					<i>in.lb</i>	36	31	25	20	16	15	18	13	11	8.9	8.0	8.0	
Max. backlash				<i>j</i> _t	<i>arcmin</i>	Standard ≤ 4 / Reduced ≤ 2												
Torsional rigidity ^{b)}				<i>C</i> _{t21}	<i>Nm/arcmin</i>	53												
					<i>in.lb/arcmin</i>	469												
Max. axial force ^{c)}				<i>F</i> _{2AMax}	<i>N</i>	9870						3000						
					<i>lb_f</i>	2221						675						
Max. lateral force ^{c)}				<i>F</i> _{2QMax}	<i>N</i>	9900						1200						
					<i>lb_f</i>	2228						270						
Max. tilting moment				<i>M</i> _{2KMax}	<i>Nm</i>	952						110						
					<i>in.lb</i>	8426						974						
Efficiency at full load				<i>η</i>	%	98.5						99						
Service life				<i>L</i> _h	<i>h</i>	> 30000												
Weight (incl. standard adapter plate)				<i>m</i>	<i>kg</i>	17.2												
					<i>lb_m</i>	38												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)				<i>L</i> _{PA}	<i>dB(A)</i>	≤ 59												
Max. permitted housing temperature					°C	+90												
					<i>F</i>	194												
Ambient temperature					°C	−15 to +40												
					<i>F</i>	5 to 104												
Lubrication						Lubricated for life												
Direction of rotation						In- and output same direction												
Protection class						IP 65						IP 52						
Metal bellows coupling (recommended product type – validate sizing with cymex®)						BC2-00500AA040.000-X												
					<i>mm</i>	X = 035.000 - 060.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]			K	38	<i>J</i> _i	<i>kgcm</i> ²	14.9	12.1	11.0	10.1	10.1	9.5	14.9	12.1	11.0	10.1	10.1	9.5
						<i>10⁻³ in.lb.s</i> ²	13.2	10.7	9.7	8.9	8.9	8.4	13.2	10.7	9.7	8.9	8.9	8.4
			M	48	<i>J</i> _i	<i>kgcm</i> ²	29.5	26.7	25.6	24.7	24.7	24.2	29.5	26.7	25.6	24.7	24.7	24.2
						<i>10⁻³ in.lb.s</i> ²	26.1	23.6	22.7	21.9	21.9	21.4	26.1	23.6	22.7	21.9	21.9	21.4

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B




1-stage

up to 38⁴⁾ (K)⁵⁾
clamping hub
diameter

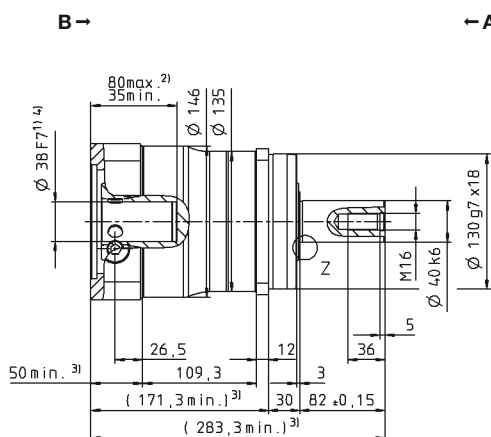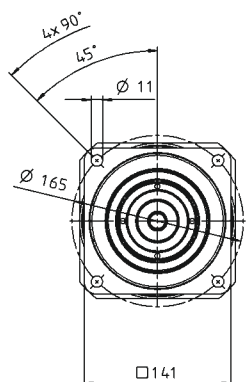

Motor shaft diameter [mm]


up to 48⁴⁾ (M)
clamping hub
diameter

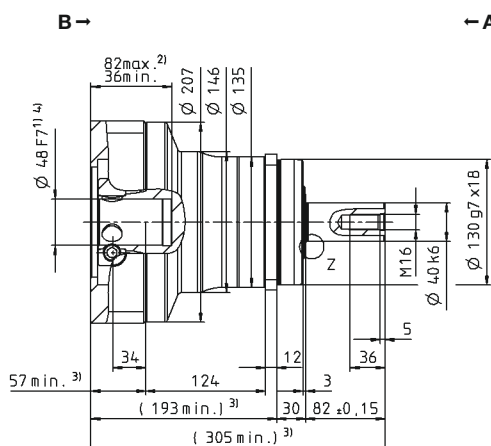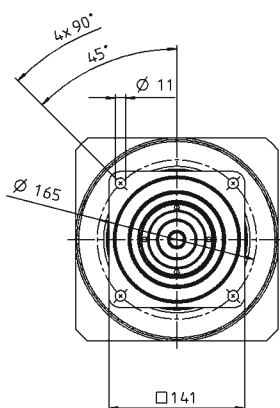
SP⁺


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 140 MC 2-stage

				2-stage											
Ratio		<i>i</i>		16	20	25	28	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		<i>T</i> _{2a}	<i>Nm</i>	480	480	480	480	480	480	480	480	380	480	380	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	4248	3363	4248	3363	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)		<i>T</i> _{2B}	<i>Nm</i>	480	480	480	480	480	480	480	480	380	480	380	
			<i>in.lb</i>	4248	4248	4248	4248	4248	4248	4248	4248	3363	4248	3363	
Nominal torque (at <i>n</i> _N)		<i>T</i> _{2N}	<i>Nm</i>	277	297	298	328	287	329	364	367	304	304	304	
			<i>in.lb</i>	2447	2629	2636	2900	2544	2915	3219	3250	2691	2690	2691	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		<i>T</i> _{2Not}	<i>Nm</i>	1350	1350	1350	1350	1350	1350	1350	1350	1250	1350	1250	
			<i>in.lb</i>	11949	11949	11949	11949	11949	11949	11949	11949	11064	11949	11064	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}		<i>n</i> _{1N}	<i>rpm</i>	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed		<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)		<i>T</i> ₀₁₂	<i>Nm</i>	1.1	1.0	0.96	0.80	0.72	0.60	0.55	0.45	0.45	0.40	0.40	
			<i>in.lb</i>	9.7	9.2	8.5	7.1	6.4	5.3	4.9	4.0	4.0	3.5	3.5	
Max. backlash		<i>j</i> _t	<i>arcmin</i>	Standard ≤ 6 / Reduced ≤ 4											
Torsional rigidity ^{b)}		<i>C</i> _{t21}	<i>Nm/arcmin</i>	53											
			<i>in.lb/arcmin</i>	469											
Max. axial force ^{c)}		<i>F</i> _{2AMax}	<i>N</i>	9870											
			<i>lb_f</i>	2221											
Max. lateral force ^{c)}		<i>F</i> _{2QMax}	<i>N</i>	9900											
			<i>lb_f</i>	2228											
Max. tilting moment		<i>M</i> _{2KMax}	<i>Nm</i>	952											
			<i>in.lb</i>	8426											
Efficiency at full load		<i>η</i>	%	96.5											
Service life		<i>L</i> _h	<i>h</i>	> 30000											
Weight (incl. standard adapter plate)		<i>m</i>	<i>kg</i>	17											
			<i>lb_m</i>	37.6											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex [®])		<i>L</i> _{PA}	<i>dB(A)</i>	≤ 59											
Max. permitted housing temperature			°C	+90											
			<i>F</i>	194											
Ambient temperature			°C	–15 to +40											
			<i>F</i>	5 to 104											
Lubrication				Lubricated for life											
Direction of rotation				In- and output same direction											
Protection class				IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex [®])				BC2-00500AA040.000-X											
			<i>mm</i>	X = 035.000 - 060.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]	G	24	<i>J</i> ₁	<i>kgcm²</i>	3.19	2.71	2.67	2.34	1.65	2.32	2.10	2.08	2.08	2.08	2.07
				<i>10⁻³ in.lb.s²</i>	2.82	2.40	2.36	2.07	1.46	2.05	1.86	1.84	1.84	1.84	1.83
	K	38	<i>J</i> ₁	<i>kgcm²</i>	10.3	9.77	9.73	9.41	2.34	9.39	9.16	9.15	1.39	9.14	9.14
				<i>10⁻³ in.lb.s²</i>	9.07	8.65	8.61	8.33	2.07	8.31	8.11	8.10	1.23	8.09	8.09

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter


^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft






2-stage

up to 24 ⁴⁾ (G) ⁵⁾
clamping hub
diameter

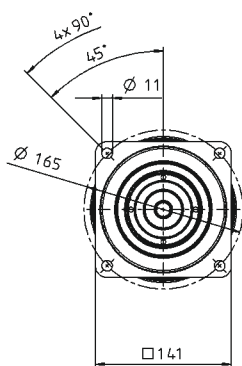

Motor shaft diameter [mm]


up to 38⁴⁾ (K)
clamping hub
diameter

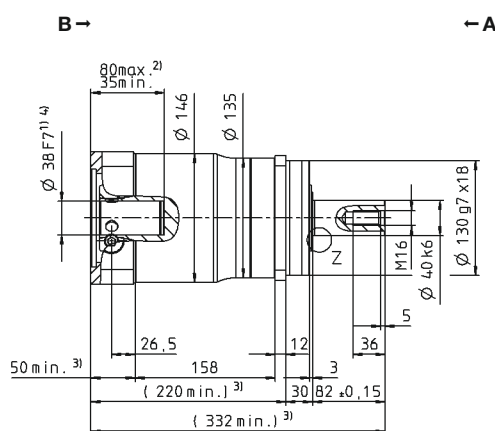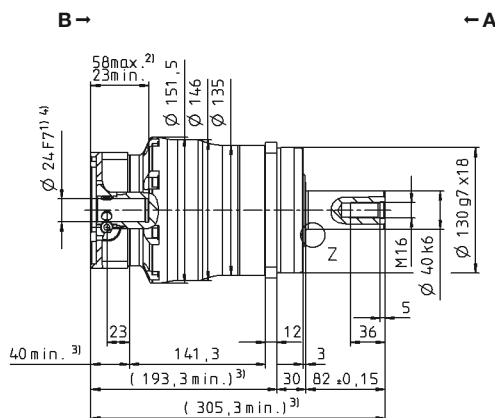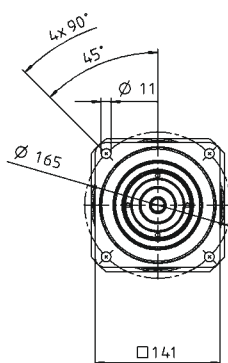 $\dot{S}^+$


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit.

2) Min. /Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 180 MC 1-stage

				Standard version MC						Friction optimized version L							
Ratio			<i>i</i>		3	4	5	7	8	10	3	4	5	7	8	10	
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	700	880	880	880	700	700	700	880	880	880	700	700	
				<i>in.lb</i>	6196	7789	7789	7789	6196	6196	6196	7789	7789	7789	6196	6196	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	700	880	880	880	700	700	700	880	880	880	700	700	
				<i>in.lb</i>	6196	7789	7789	7789	6196	6196	6196	7789	7789	7789	6196	6196	
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	289	492	379	469	465	488	289	492	379	469	465	488	
				<i>in.lb</i>	2554	4355	3357	4151	4117	4316	2554	4355	3357	4151	4117	4316	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	2640	2750	2750	2750	2640	2640	2640	2750	2750	2750	2640	2640	
				<i>in.lb</i>	23366	24340	24340	24340	23366	23366	23366	24340	24340	24340	23366	23366	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	3000	3500	4500	4500	4500	4500	3000	3500	4500	4500	4500	4500	
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	4500	6000	6000	6000	6000	6000	4500	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 3000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	8.8	7.4	6.0	4.4	4.4	3.2	3.8	3.0	2.3	1.8	1.7	1.6	
				<i>in.lb</i>	78	66	53	39	39	28	34	27	20	16	15	14	
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 4 / Reduced ≤ 2												
Torsional rigidity ^{b)}			<i>C</i> _{t21}	<i>Nm/arcmin</i>	175												
				<i>in.lb/arcmin</i>	1549												
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	14150						5000						
				<i>lb_f</i>	3184						1125						
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	15400						2000						
				<i>lb_f</i>	3465						450						
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	1600						208						
				<i>in.lb</i>	14161						1841						
Efficiency at full load			<i>η</i>	%	98.5						99						
Service life			<i>L</i> _h	<i>h</i>	> 30000												
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	34												
				<i>lb_m</i>	75.1												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 62												
Max. permitted housing temperature				°C	+90												
				<i>F</i>	194												
Ambient temperature				°C	−15 to +40												
				<i>F</i>	5 to 104												
Lubrication					Lubricated for life												
Direction of rotation					In- and output same direction												
Protection class					IP 65						IP 52						
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-00800AA055.000-X												
				<i>mm</i>	X = 040.000 - 075.000												
Mass moment of inertia (relates to the drive)		M	48	<i>J</i> _i	<i>kgcm</i> ²	58.5	41.6	35.6	30.0	30.0	26.9	58.5	41.6	35.6	30.0	30.0	26.9
Clamping hub diameter [mm]					<i>10⁻³ in.lb.s</i> ²	51.8	36.8	31.5	26.6	26.6	23.8	51.8	36.8	31.5	26.6	26.6	23.8

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B

Motor shaft diameter [mm]

1-stage

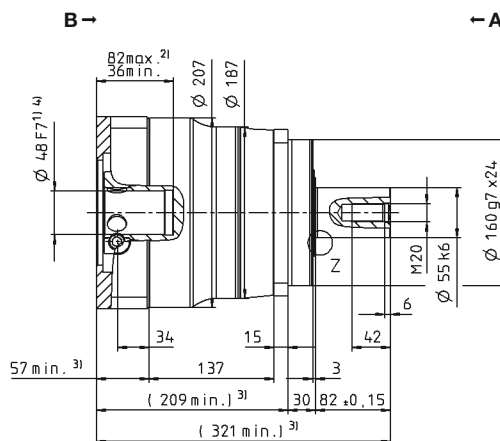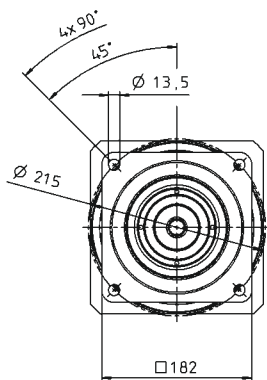up to 48⁴⁾ (M)⁵⁾
clamping hub diameter



Planetary gearboxes

SP


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 180 MC 2-stage

				2-stage											
Ratio		<i>i</i>		16	20	25	28	32	35	40	50	64	70	100	
Max. torque ^{a) b) e)}		<i>T</i> _{2a}	Nm	880	880	880	880	880	880	880	880	700	880	700	
			in.lb	7789	7789	7789	7789	7789	7789	7789	7789	7789	6196	7789	6196
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)		<i>T</i> _{2B}	Nm	880	880	880	880	880	880	880	880	700	880	700	
			in.lb	7789	7789	7789	7789	7789	7789	7789	7789	7789	6196	7789	6196
Nominal torque (at <i>n</i> _m)		<i>T</i> _{2N}	Nm	696	704	704	704	704	704	704	704	560	704	560	
			in.lb	6156	6231	6231	6231	6231	6231	6231	6231	6231	4956	6231	4956
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)		<i>T</i> _{2Not}	Nm	2750	2750	2750	2750	2750	2750	2750	2750	2640	2750	2640	
			in.lb	24340	24340	24340	24340	24340	24340	24340	24340	24340	23366	24340	23366
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}		<i>n</i> _{1N}	rpm	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500	
Max. input speed		<i>n</i> _{1Max}	rpm	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> _i = 3000 rpm and 20 °C gearbox temperature)		<i>T</i> ₀₁₂	Nm	2.2	2.3	1.8	1.7	1.7	1.4	1.2	1.2	1.2	0.95	1.0	
			in.lb	20	21	16	15	15	12	11	11	11	8.4	9.2	
Max. backlash		<i>j</i> _t	arcmin	Standard ≤ 6 / Reduced ≤ 4											
Torsional rigidity ^{b)}		<i>C</i> _{t21}	Nm/arcmin	175											
			in.lb/arcmin	1549											
Max. axial force ^{c)}		<i>F</i> _{2AMax}	N	14150											
			lb _f	3184											
Max. lateral force ^{c)}		<i>F</i> _{2QMax}	N	15400											
			lb _f	3465											
Max. tilting moment		<i>M</i> _{2KMax}	Nm	1600											
			in.lb	14161											
Efficiency at full load		<i>η</i>	%	96.5											
Service life		<i>L</i> _h	h	> 30000											
Weight (incl. standard adapter plate)		<i>m</i>	kg	36											
			lb _m	79.6											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)		<i>L</i> _{PA}	dB(A)	≤ 58											
Max. permitted housing temperature			°C	+90											
			F	194											
Ambient temperature			°C	-15 to +40											
			F	5 to 104											
Lubrication				Lubricated for life											
Direction of rotation				In- and output same direction											
Protection class				IP 65											
Metal bellows coupling (recommended product type – validate sizing with cymex®)				BC2-00800AA055.000-X											
			mm	X = 040.000 - 075.000											
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]		K 38	<i>J</i> _i	kgcm ²	13.5	12.0	11.7	10.6	10.6	10.4	9.74	9.68	5.45	9.63	9.60
				10 ⁻³ in.lb.s ²	12.0	10.6	10.4	9.34	9.34	9.23	8.62	8.57	4.82	8.52	8.50

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B

Motor shaft diameter [mm]

2-stage

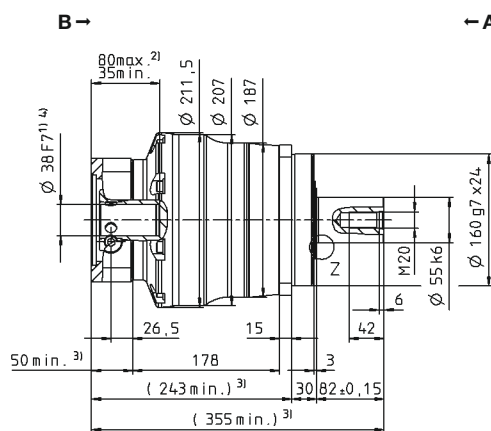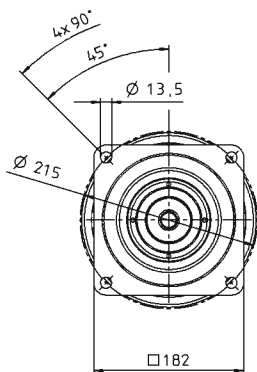up to 38 ⁴⁾ (K) ⁵⁾
clamping hub
diameter



Planetary gearboxes

SP


MC

Other output variants



Shaft with key



Splined shaft (DIN 5480)



Shaft mounted



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 210 MC 1-stage

			Standard version MC						Friction optimized version L								
Ratio			<i>i</i>		3	4	5	7	8	10	3	4	5	7	8	10	
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	1200	2000	2000	1700	1200	1200	1200	2000	2000	1700	1200	1200	
				<i>in.lb</i>	10621	17702	17702	15046	10621	10621	10621	17702	17702	15046	10621	10621	
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	1200	2000	2000	1700	1200	1200	2000	2000	1700	1200	1200		
				<i>in.lb</i>	10621	17702	17702	15046	10621	10621	10621	17702	17702	15046	10621	10621	
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	960	1260	1141	1169	960	960	960	1260	1141	1169	960	960	
				<i>in.lb</i>	8497	11148	10098	10347	8497	8497	8497	11148	10098	10347	8497	8497	
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900	
				<i>in.lb</i>	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220	
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{d)}			<i>n</i> _{1N}	<i>rpm</i>	2250	2500	3500	3500	3500	3500	2250	2500	3500	3500	3500	3500	
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	3400	6000	6000	6000	6000	6000	3400	6000	6000	6000	6000	6000	
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 2000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	12	11	8.4	5.6	5.6	3.6	5.5	4.9	4.6	4.0	3.8	3.6	
				<i>in.lb</i>	108	99	74	50	50	32	49	43	41	35	34	32	
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 4 / Reduced ≤ 2												
Torsional rigidity ^{b)}			<i>C</i> _{t21}	<i>Nm/arcmin</i>	400												
				<i>in.lb/arcmin</i>	3540												
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	30000						8000						
				<i>lb_f</i>	6750						1800						
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	21000						2500						
				<i>lb_f</i>	4725						563						
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	3100						310						
				<i>in.lb</i>	27437						2744						
Efficiency at full load			<i>η</i>	%	98.5						99						
Service life			<i>L</i> _h	<i>h</i>	> 30000												
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	58												
				<i>lb_m</i>	128.2												
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 64												
Max. permitted housing temperature				°C	+90												
				<i>F</i>	194												
Ambient temperature				°C	−15 to +40												
				<i>F</i>	5 to 104												
Lubrication					Lubricated for life												
Direction of rotation					In- and output same direction												
Protection class					IP 65						IP 52						
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-04000AA075.000-X												
				<i>mm</i>	X = 050.000 - 090.000												
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]		N	55	<i>J</i> _i	<i>kgcm²</i>	139	94.3	76.9	61.5	61.5	53.1	139	94.3	76.9	61.5	61.5	53.1
					<i>10⁻³ in.lb.s²</i>	123	83.5	68.1	54.4	54.4	47.0	123	83.5	68.1	54.4	54.4	47.0

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com


^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft



MC

SP⁺ 210 MC 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	1680	1800	2000	1680	1680	1920	1040	1300	1200	1700	1200
				<i>in.lb</i>	14869	15931	17702	14869	14869	16994	9205	11506	10621	15046	10621
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	1680	1800	2000	1680	1680	1920	1040	1300	1200	1700	1200
				<i>in.lb</i>	14869	15931	17702	14869	14869	16994	9205	11506	10621	15046	10621
Nominal torque (at <i>n</i> _{1N})			<i>T</i> _{2N}	<i>Nm</i>	898	728	910	744	1344	929	787	984	960	1360	960
				<i>in.lb</i>	7949	6445	8056	6581	11895	8226	6969	8711	8497	12037	8497
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900	5900
				<i>in.lb</i>	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220	52220
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{e)}			<i>n</i> _{1N}	<i>rpm</i>	3500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 2000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	3.4	3.1	2.9	2.6	2.6	2.0	2.0	1.8	1.8	1.6	1.6
				<i>in.lb</i>	30	27	25	23	23	18	18	16	16	14	14
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 5 / Reduced ≤ 4										
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	400										
				<i>in.lb/arcmin</i>	3540										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	30000										
				<i>lb_f</i>	6750										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	21000										
				<i>lb_f</i>	4725										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	3100										
				<i>in.lb</i>	27437										
Efficiency at full load			<i>η</i>	%	96.5										
Service life			<i>L</i> _h	<i>h</i>	> 30000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	53										
				<i>lb_m</i>	117.1										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 57										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	–15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-04000AA075.000-X										
				<i>mm</i>	X = 050.000 - 090.000										
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]		M 48	<i>J</i> _i	<i>kgcm</i> ²	34.5	31.5	30.8	30.0	30.0	29.7	28.5	28.3	28.3	28.1	28.0
				<i>10⁻³ in.lb.s</i> ²	30.5	27.9	27.3	26.6	26.6	26.3	25.2	25.0	25.0	24.9	24.8

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures




^{e)} Smooth shaft

View A

View B

Motor shaft diameter [mm]

2-stage

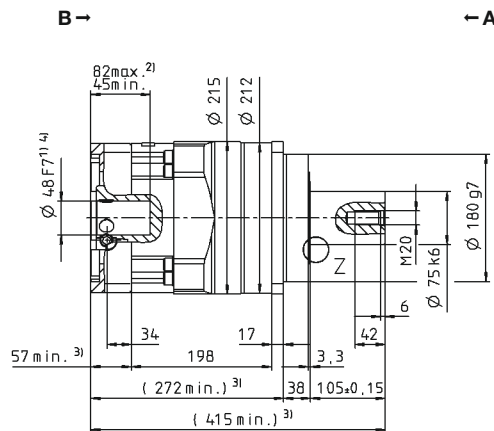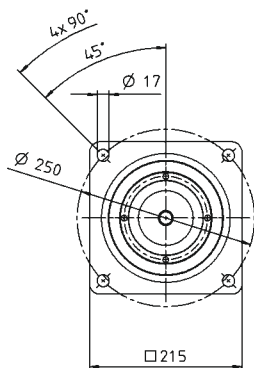up to 48 ⁴⁾ (M) ⁵⁾
clamping hub
diameter



Planetary gearboxes

SP



MC

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

¹⁾ Check motor shaft fit

²⁾ Min./Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

³⁾ The dimensions depend on the motor

⁴⁾ Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 240 MC 1-stage

			Standard version MC						Friction optimized version L							
Ratio			<i>i</i>		3	4	5	7	8	10	3	4	5	7	8	10
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	1750	3500	3600	2700	1800	1800	1750	3500	3600	2700	1800	1800
				<i>in.lb</i>	15489	30978	31863	23897	15931	15931	15489	30978	31863	23897	15931	15931
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	1750	3500	3600	2700	1800	1800	1750	3500	3600	2700	1800	1800
				<i>in.lb</i>	15489	30978	31863	23897	15931	15931	15489	30978	31863	23897	15931	15931
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	1400	2029	1861	1910	1440	1440	1400	2029	1861	1910	1440	1440
				<i>in.lb</i>	12391	17955	16471	16909	12745	12745	12391	17955	16471	16909	12745	12745
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	6850	8500	8500	8500	6850	6850	6850	8500	8500	8500	6850	6850
				<i>in.lb</i>	60628	75232	75232	75232	60628	60628	60628	75232	75232	75232	60628	60628
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{e)}			<i>n</i> _{1N}	<i>rpm</i>	1750	2250	3000	3000	3000	3000	1750	2250	3000	3000	3000	3000
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	3400	4000	5000	5000	5000	5000	3400	4000	5000	5000	5000	5000
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 2000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	18	16	12	8.6	8.6	5.8	8.0	7.0	6.0	5.0	4.8	4.2
				<i>in.lb</i>	159	141	107	77	77	51	71	62	53	44	43	37
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 4 / Reduced ≤ 2											
Torsional rigidity ^{b)}			<i>C</i> _{i21}	<i>Nm/arcmin</i>	550											
				<i>in.lb/arcmin</i>	4868											
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	33000						10000					
				<i>lb_f</i>	7425						2250					
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	30000						2000					
				<i>lb_f</i>	6750						450					
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	5000						280					
				<i>in.lb</i>	44254						2478					
Efficiency at full load			<i>η</i>	%	98.5						99					
Service life			<i>L</i> _n	<i>h</i>	> 30000											
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	83											
				<i>lb_m</i>	183.4											
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 66											
Max. permitted housing temperature				°C	+90											
				<i>F</i>	194											
Ambient temperature				°C	–15 to +40											
				<i>F</i>	5 to 104											
Lubrication					Lubricated for life											
Direction of rotation					In- and output same direction											
Protection class					IP 65						IP 52					
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-04000AA085.000-X											
				<i>mm</i>	X = 050.000 - 090.000											
Mass moment of inertia (relates to the drive)		O 60	<i>J</i> _i	<i>kgcm</i> ²	260	198	163	138	138	125	260	198	163	138	138	125
Clamping hub diameter [mm]				<i>10</i> ⁻³ <i>in.lb.s</i> ²	230	175	144	122	122	110	230	175	144	122	122	110

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com

^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange




^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft

Motor shaft diameter [mm]

1-stage


up to 60 ⁴⁾ (O) ⁵⁾
clamping hub
diameter

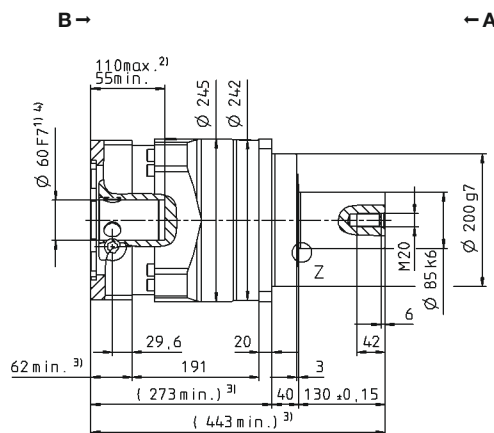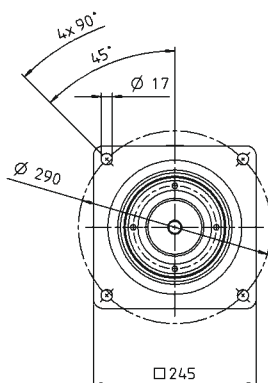 $\frac{d}{ds}$



MC

Other output variants

Shaft with key



Splined shaft (DIN 5480)



Non-tolerated dimensions are nominal dimensions

- 1) Check motor shaft fit

2) Min. /Max. permissible motor shaft length. Longer motor shafts are possible, please contact alpha.

3) The dimensions depend on the motor

4) Smaller motor shaft diameter is compensated by a bushing with a minimum thickness of 1 mm

⁵⁾ Standard clamping hub diameter

SP⁺ 240 MC 2-stage

				2-stage											
Ratio			<i>i</i>		16	20	25	28	32	35	40	50	64	70	100
Max. torque ^{a) b) e)}			<i>T</i> _{2a}	<i>Nm</i>	3500	3500	3600	2900	2900	3600	1680	2100	1800	2700	1800
				<i>in.lb</i>	30978	30978	31863	25667	25667	31863	14869	18587	15931	23897	15931
Max. acceleration torque ^{b) e)} (max. 1000 cycles per hour)			<i>T</i> _{2B}	<i>Nm</i>	3500	3500	3600	2900	2900	3600	1680	2100	1800	2700	1800
				<i>in.lb</i>	30978	30978	31863	25667	25667	31863	14869	18587	15931	23897	15931
Nominal torque (at <i>n</i> _{IN})			<i>T</i> _{2N}	<i>Nm</i>	1950	1803	2266	1867	2320	2694	1344	1680	1440	2160	1440
				<i>in.lb</i>	17255	15960	20058	16521	20534	23843	11895	14869	12745	19118	12745
Emergency stop torque ^{a) b) e)} (permitted 1000 times during the service life of the gearbox)			<i>T</i> _{2Not}	<i>Nm</i>	8500	8500	8500	8500	8500	8500	8500	8500	6850	8500	6850
				<i>in.lb</i>	75232	75232	75232	75232	75232	75232	75232	75232	60628	75232	60628
Permitted average input speed (at <i>T</i> _{2N} and 20 °C ambient temperature) ^{e)}			<i>n</i> _{1N}	<i>rpm</i>	3500	4500	4500	4500	4500	4500	4500	4500	4500	4500	4500
Max. input speed			<i>n</i> _{1Max}	<i>rpm</i>	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000	6000
Mean no load running torque ^{b)} (at <i>n</i> ₁ = 2000 rpm and 20 °C gearbox temperature)			<i>T</i> ₀₁₂	<i>Nm</i>	4.8	4.4	4.0	3.6	3.6	2.8	2.4	2.0	2.0	1.6	1.4
				<i>in.lb</i>	43	39	35	32	32	25	21	18	18	14	13
Max. backlash			<i>j</i> _t	<i>arcmin</i>	Standard ≤ 5 / Reduced ≤ 4										
Torsional rigidity ^{b)}			<i>C</i> ₁₂₁	<i>Nm/arcmin</i>	550										
				<i>in.lb/arcmin</i>	4868										
Max. axial force ^{c)}			<i>F</i> _{2AMax}	<i>N</i>	33000										
				<i>lb_f</i>	7425										
Max. lateral force ^{c)}			<i>F</i> _{2QMax}	<i>N</i>	30000										
				<i>lb_f</i>	6750										
Max. tilting moment			<i>M</i> _{2KMax}	<i>Nm</i>	5000										
				<i>in.lb</i>	44254										
Efficiency at full load			<i>η</i>	%	96.5										
Service life			<i>L</i> _h	<i>h</i>	> 30000										
Weight (incl. standard adapter plate)			<i>m</i>	<i>kg</i>	76										
				<i>lb_m</i>	168.0										
Operating noise (at reference ratio and reference speed – ratio-specific values available in cymex®)			<i>L</i> _{PA}	<i>dB(A)</i>	≤ 58										
Max. permitted housing temperature				°C	+90										
				<i>F</i>	194										
Ambient temperature				°C	–15 to +40										
				<i>F</i>	5 to 104										
Lubrication					Lubricated for life										
Direction of rotation					In- and output same direction										
Protection class					IP 65										
Metal bellows coupling (recommended product type – validate sizing with cymex®)					BC2-04000AA085.000-X										
			Bore diameter of coupling on the application side			<i>mm</i>	X = 050.000 - 090.000								
Mass moment of inertia (relates to the drive) Clamping hub diameter [mm]		M 48	<i>J</i> _i	<i>kgcm²</i>	34.5	31.5	30.8	30.0	30.0	29.7	28.5	28.3	28.3	28.1	28.0
				<i>10⁻³ in.lb.s²</i>	30.5	27.9	27.3	26.6	26.6	26.3	25.2	25.1	25.1	24.9	24.8

Please use our sizing software cymex[®] for a detailed sizing – www.wittenstein-cymex.com


^{a)} At max. 10 % F_{2QMax}

^{b)} Valid for standard clamping hub diameter

^{c)} Refers to center of the output shaft or flange

^{d)} Please reduce input speed at higher ambient temperatures

^{e)} Smooth shaft



MC